



NIDEC OKK CORPORATION

8-10,KITA-ITAMI,ITAMI
HYOGO 664-0831 JAPAN
International Sales Department
TEL:(81)72-771-1143
www.nidec.com/en/nidec-okk/
E-mail:nokk.ovsd@nidec.com

NIDEC OKK A DIVERSIFIED MANUFACTURER OF MACHINE TOOLS

Specializes In:

Machining centers
Graphite cutting machining centers
Grinding centers
CNC Milling machines
Conventional milling machines
Total die and mold making systems
Flexible manufacturing cells and systems

NOTE :

NIDEC OKK reserves the right to change the information contained in this brochure without notice.
NIDEC OKK is not responsible to make changes to previously sold machines or accessories.
The machines in the photographs of this brochure may include optional accessories.

The export of this product is subject to an authorization from the government of the exporting country.
Check with the government agency for authorization.

NIDEC OKK USA CORPORATION
100 REGENCY DRIVE, GLENDALE HEIGHTS, IL 60139 U.S.A.
TEL: (1)630-924-9000
FAX: (1)630-924-9010

NIDEC OKK Europe GmbH
HANSEMANSTR 33 41468 NEUSS, GERMANY
TEL: (49)2131-29868-0
FAX: (49)2131-29868-41

NIDEC OKK Machinery (THAILAND) Co., Ltd.
KUMTHORN HOLDING BUILDING 2nd FLOOR 897-897/1 Rama 3 Road, Bangpongpan, YANNAWA, BANGKOK 10120 THAILAND
TEL: (66)2-683-2160-2
FAX: (66)2-683-2163

NIDEC OKK (SHANGHAI) CO., LTD.
12F, TOWER B, 100 ZUNYI ROAD, CHANG NING DISTRICT, SHANGHAI, CHINA
TEL: (86)21-62700930
FAX: (86)21-62700931




5-axis Horizontal Machining Center

HM-X SERIES

HM-X6000

HM-X8000

HM16000

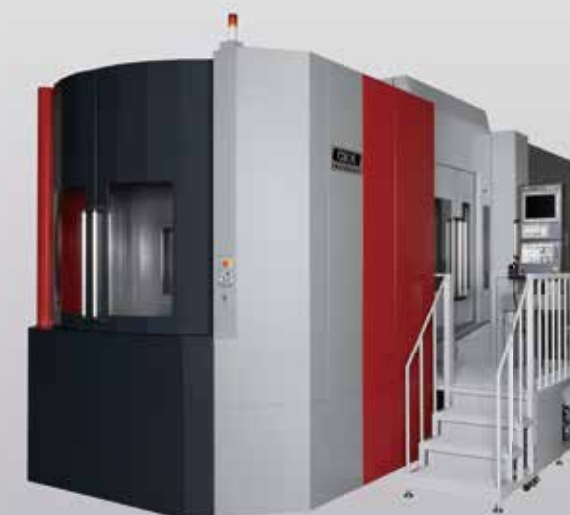


www.nidec.com/en/nidec-okk/

NIDEC OKK CORPORATION



Printed in Japan
22.06.FE(T)

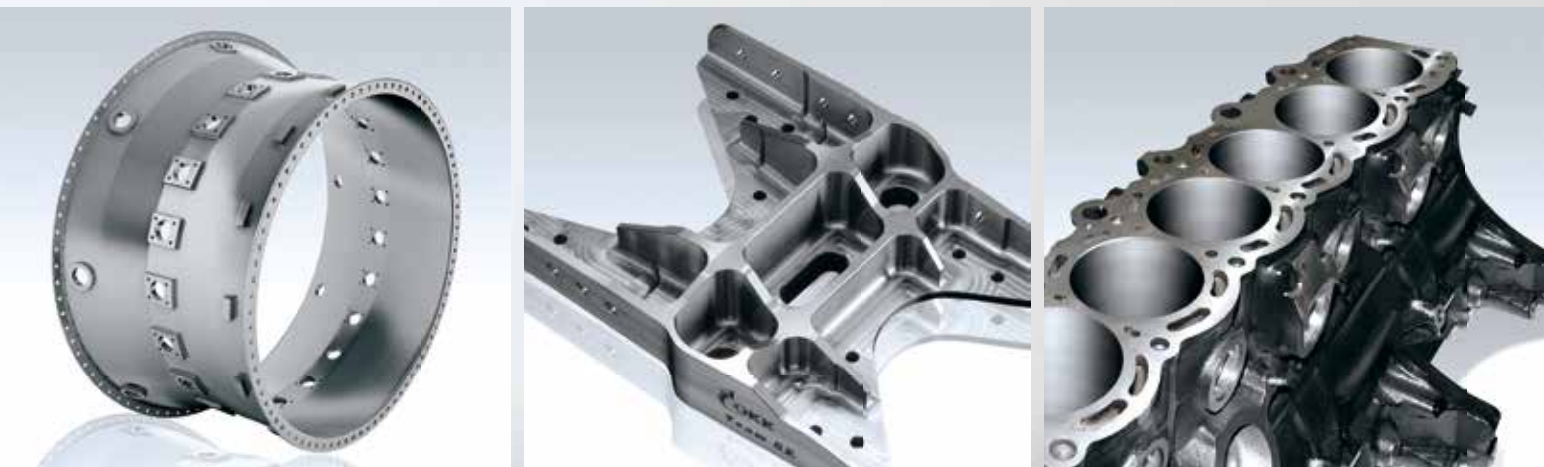

Highly-efficient machining of extremely complex parts!

As with all OKKs we paid special attention to the rigidity of the cast body, built solid and features our massive liner roller guides and large-diameter ball screws for the feed system, allowing the HM-X Series to easily cut exotic materials. All OKK horizontals feature Core chilled pre-tensioned and double-anchored ball screws in order to maintain the high accuracy needed throughout long hours of machining.



HM-X

SERIES

5-axis Horizontal Machining Center

HM-X SERIES

5-axis machining center is built on
the battlefield proven HM-series
platform.
Excellent in both speed and rigidity.



HM-X 6000

Reliability has further increased with our innovative Trunnion table

Rapid traverse rate (X, Y, Z)	54m/min(2126ipm) (OP: 75m/min(2953ipm))	Maximum loading capacity	650kg (1433lbs)	Spindle torque (25% ED/Continuous rating)	420/238N·m (310/176ft·lbs)
Rapid traverse rate (A, B)	A:10 B:33.3min ⁻¹	Spindle nose (Nominal number)	7/24 taper, No.50	Spindle output (30-min/Continuous rating)	30/25kW (40/34HP)
Maximum workpiece size	φ750×H700mm(dia.29.53"×H27.56")				
				Spindle rotating speed	35~12000min ⁻¹



HM-X 8000

Tilting spindle head structure allows superior 5 axis machining without inclining a heavy workpiece
Up to 2000 kg can be loaded on the table supported with on large crossed roller bearings

Rapid traverse rate (X, Y, Z)	48m/min(1890ipm)	Maximum loading capacity	2000kg (4409lbs)	Spindle torque (25% ED/Continuous rating)	623/305N·m (460/225ft·lbs)
Rapid traverse rate (A, B)	A:8.3 B:16.7min ⁻¹	Spindle nose (Nominal number)	7/24 taper, No.50	Spindle output (30-min/Continuous rating)	45/26kW (60/35HP)
Maximum workpiece size	φ1200×H1250mm(dia.47.24"×H49.21")				
				Spindle rotating speed	35~12000min ⁻¹

OKK has integrated our new 5-axis control technologies recently only available on our vertical machining centers.

HM-X 6000

HM-X SERIES




New innovative Trunnion table

The solid dual-disc clamping method of the Trunnion table ensures the brake retains force of 10000N·m(7376ft·lbs) for the A axis and 6800N·m(5015ft·lbs) for the B axis.

The double (hydraulic and mechanical) clamping method is being used for our pallet clamping which ensures the clamping force of 96000N. The pallet clamping continues to hold even in the event of power failure, keeping your employees safe and downtime to a minimal.

Trunnion table drive system has been changed to the new roller type from the conventional slide. This allows for improved indexing accuracy, rotary encoders are used for the A and B axes as a part of the standard specification.

The tilting axis is outfitted with a no-backlash mechanism. (what mechanism).

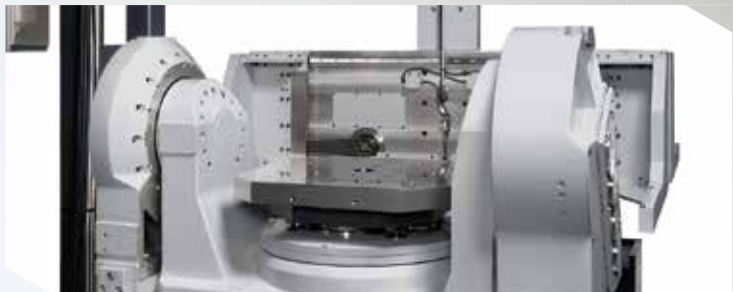

Exceptional rigidity and accuracy

High-power, High-torque spindle head paired with our tremendously rigid main body allows you to put the power in the cut.




Spindle taper	No.50
Spindle motor	30/25kW(40/34HP)
Maximum torque	420N·m(310ft·lbs) OP: 623N·m(460ft·lbs)
Spindle diameter	$\phi 100\text{mm}$ (dia.3.94")

OKK's liner roller guides and large-diameter ball screws provide a highly rigid feed system.

This combined with our high-power head allow for heavy-duty machining.

Rapid traverse rates of 54m/min(2126ipm) (75m/min(2953ipm) optionally) for the X, Y and Z axes, 10 min⁻¹ for the A axis and 33.3 min⁻¹ for the B axis enable high-speed machining.

As a part of the standard specification, core chilled and pre-tensioned, double-anchored ball screws matched with thermal displacement correction function (OKK's original function) result in minimal thermal displacement errors for 24-hour high-accuracy machining.

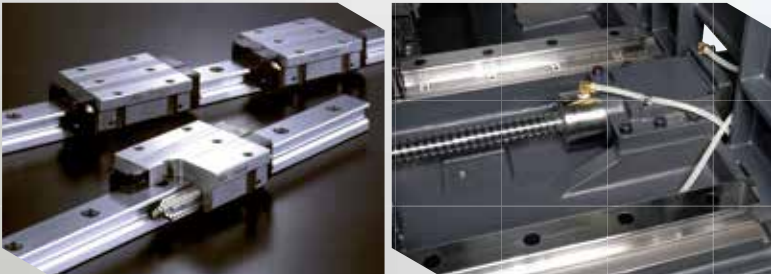


Direct-turn APC (automatic pallet changer) is standard

The APC unit allows for the operator to setup work for the next operation while machining on the other pallet. Just push the pallet ready button once part is ready to be machined. When pallet change m-code is called, the pallet changes even if operator is not present so that long hours of unmanned operations are possible.

Use of the direct-turn APC reduces cycle time and floor space.



Side view from inside machine

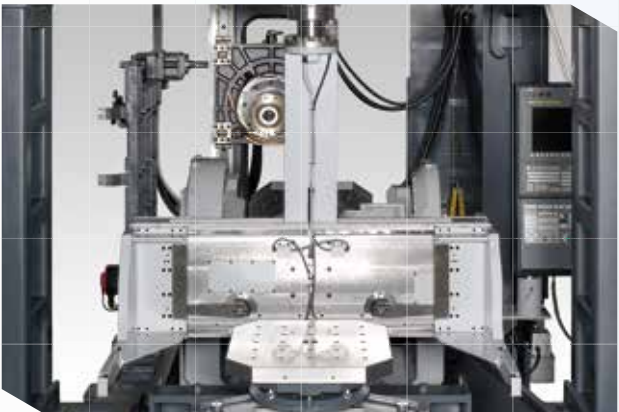


Setup side

Wide adaptability
Machine medium and large-sized workpieces
regardless of their materials

HM-X 8000


HM-X SERIES

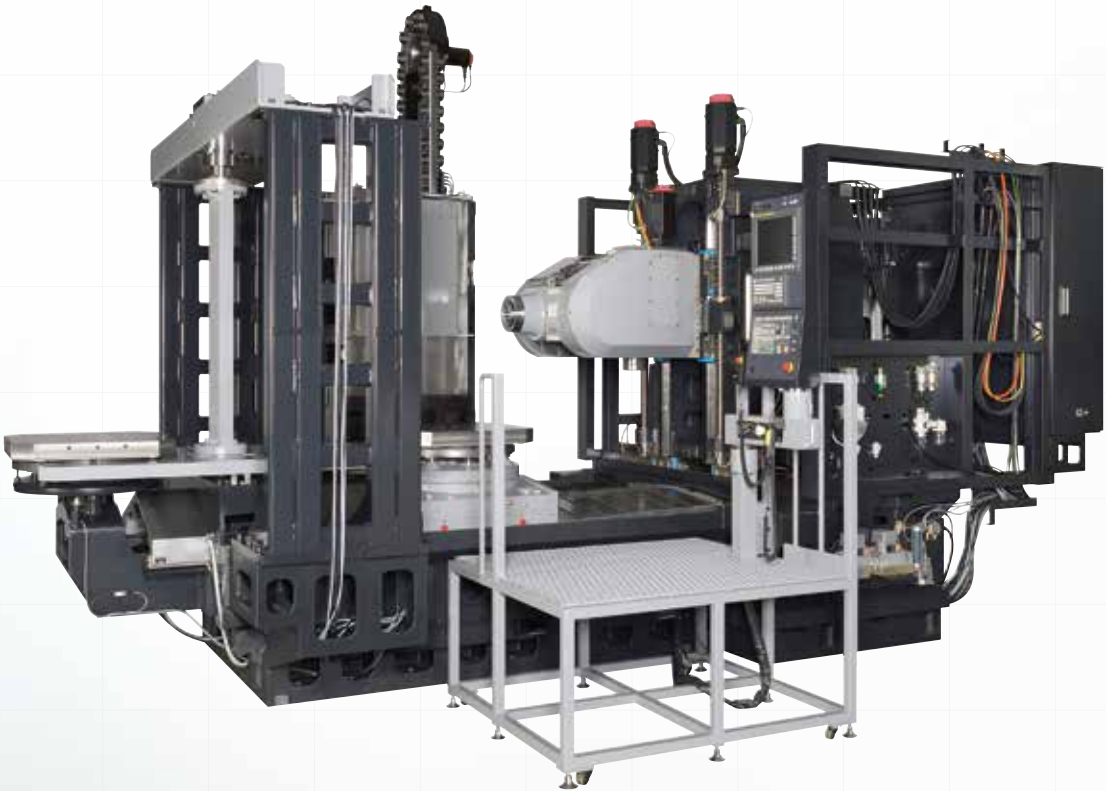

A-axis at -90 degrees

Tilting axis (A axis) is in the spindle head

The head tilting structure improves ergonomics for the operator allowing them to easily access and visually check workpieces inside the machine. Machining is possible with the spindle positioned in the vertical and horizontal position. When the angle of the A-axis is -90 degrees, access to the position where the center of the spindle is aligned with the center of the pallet.

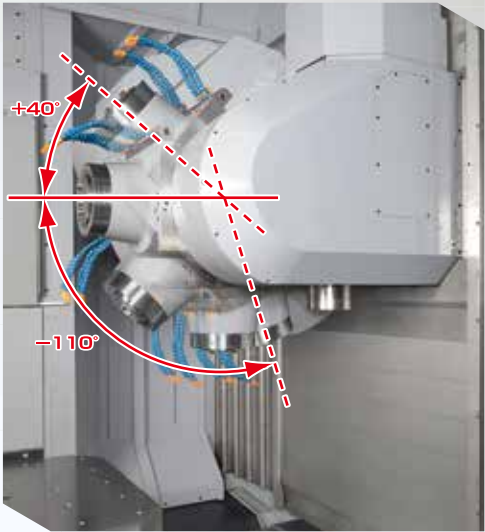


Highest-in-class spindle torque

45kW(60HP)(25%ED)/623N·m (460ft·lbs)(15%ED) high-power and high-torque built-in motor



Maximum 2000kg(4409lbs) can be loaded on the table

Use of the large-diameter crossed roller bearing improves rigidity of the table and enables loading up to 2000kg(4409lbs). The brake torque has also been improved with the use of spike type brake disc. Medium and large-sized workpieces are easily loadable up to a maximum $\phi 1200 \times H1250$ mm (dia.47.24" \times H49.21")-high.

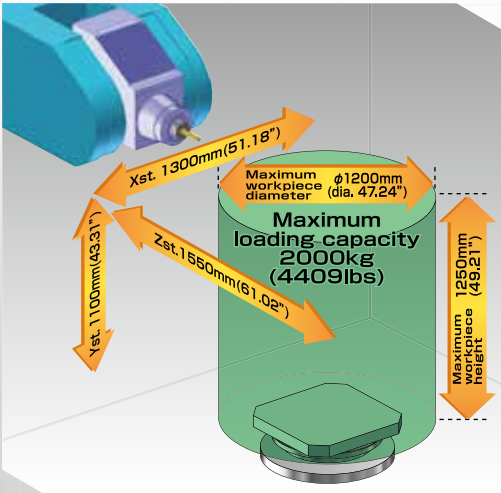

Incomparable rigidity and accuracy

Rigid liner roller guides and large-diameter twin ball screws used for the X and Y axes improve machining quality. As standard on all OKK horizontals the HM-X8000 is equipped with core chilled and pre-tensioned, double-anchored ball screws and our thermal displacement correction function (OKK's original function) resulting in minimal thermal displacement errors for 24-hour high-accuracy machining.




Accessibility


Improved accessibility ensures higher operability. Easily set work offsets and inspect workpieces inside the machine.



Torque Diagram

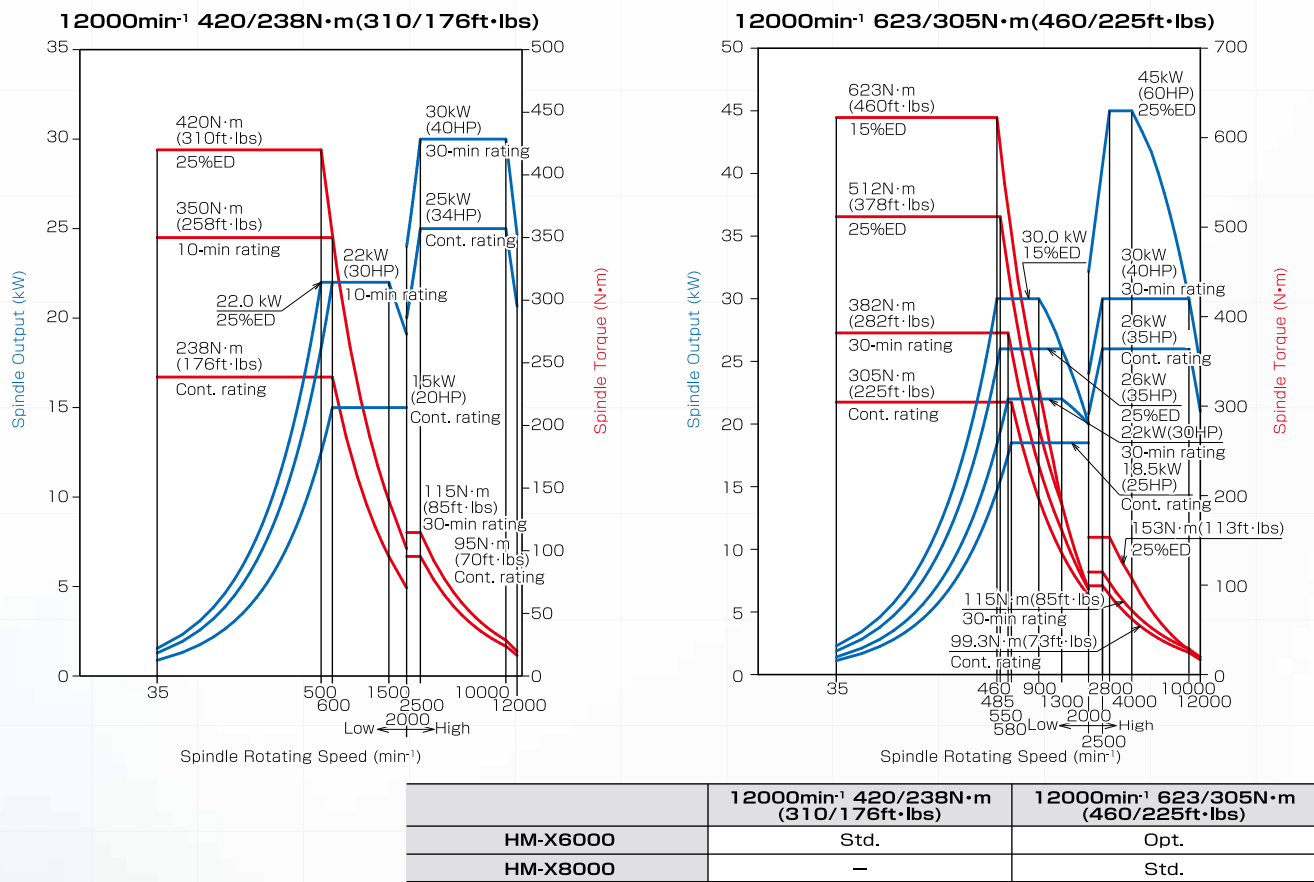

Accuracy

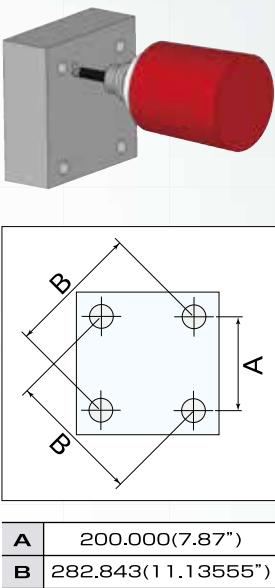

Cutting Accuracy

	HM-X6000		HM-X8000	
	OKK tolerance	Result	OKK tolerance	Result
Axial direction	0.015 (0.00059")	0.003 (0.00012")	0.015 (0.00059")	0.004 (0.00016")
Diagonal direction	0.015 (0.00059")	0.005 (0.00020")	0.015 (0.00059")	0.002 (0.00008")
Deviation of hole dia	0.010 (0.00039")	0.005 (0.00020")	0.015 (0.00059")	0.004 (0.00016")

Circular Cutting Accuracy



	HM-X6000		HM-X8000	
	OKK tolerance	Result	OKK tolerance	Result
Circularity	0.015 (0.00059")	0.004 (0.00016")	0.015 (0.00059")	0.004 (0.00016")

Positioning Accuracy

		HM-X6000	HM-X8000
		±0.0025(0.00010")/full length	X:±0.0025(0.00010")/full length Y:±0.0025(0.00010")/full length Z:±0.0030(0.00012")/full length
Positioning accuracy (X, Y, Z)	Without linear scale	±0.0025(0.00010")/full length	X:±0.0025(0.00010")/full length Y:±0.0025(0.00010")/full length Z:±0.0030(0.00012")/full length
	With linear scale	±0.0015(0.00006")/full length	±0.0015(0.00006")/full length
Positioning repeatability (X, Y, Z)	Without linear scale	±0.0015(0.00006")/full length	±0.0015(0.00006")/full length
	With linear scale	±0.0010(0.00004")/full length	±0.0010(0.00004")/full length
Positioning accuracy	With encoder	A axis: ±5 sec; B axis: ±2.5 sec	A axis: ±5 sec; B axis: ±2.5 sec

(OKK tolerance)

Machining Capabilities

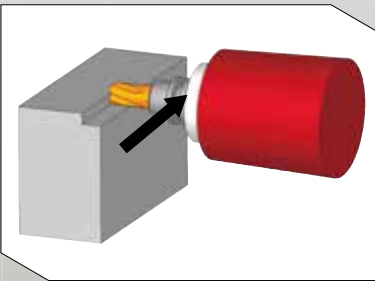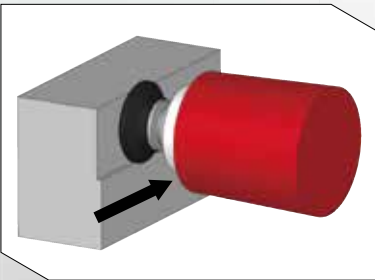

		HM-X6000	HM-X8000	
			Angle of A axis: 0°	Angle of A axis: 90°
Machining conditions	Unit	Face milling $\phi 125(4.92") \times T6$		
Spindle rotating speed	min ⁻¹	300	400	400
Cut width	mm	100(3.94")	100(3.94")	100(3.94")
Cut depth	mm	6(0.24")	6(0.24")	6(0.24")
Feed rate	mm/min	780(31ipm)	700(28ipm)	800(31 ipm)
Cutting amount	cm³/min	468(28.5in³/min)	420(25.6in³/min)	480(29.3in³/min)
Spindle motor load	%	102%	100%	100%
Workpiece material		S45C	S45C	S45C

		HM-X6000	HM-X8000	
			Angle of A axis: 0°	Angle of A axis: 90°
Machining conditions	Unit	Side milling $\phi 40(1.57") \times 6T$	Side milling $\phi 50(1.97") \times 6T$	
Spindle rotating speed	min ⁻¹	200	200	200
Cut width	mm	20(0.79")	15(0.59")	15(0.59")
Cut depth	mm	50(1.97")	50(1.97")	50(1.97")
Feed rate	mm/min	240(9ipm)	200(8ipm)	240(9ipm)
Cutting amount	cm³/min	240(14.6in³/min)	150(9.2in³/min)	180(11 in³/min)
Spindle motor load	%	80%	68%	78%
Workpiece material		S45C	S45C	S45C

Simultaneous 5-axis taper cone machining

	HM-X6000		HM-X8000	
	OKK tolerance	Result	OKK tolerance	Result
Circularity	0.050 (0.00197")	0.012 (0.00047")	0.050 (0.00197")	0.015 (0.00059")

Remarks

- *1: The above sample data shows short-time machining examples and the results of continuous machining may differ.
- *2: The above sample data show the accuracy under the OKK's in-house cutting test conditions. The results may vary with the conditions of the cutting tools and fixtures.
- *3: The accuracies shown above are the values obtained based on the OKK's inspection standards under the conditions that the machine is installed according to the OKK's foundation drawing while keeping the ambient temperature constant.

Unmanned Operation

Matrix Magazine and Multi Pallet are available as an option. These systems can be expanded easily in the field after its delivery.



Matrix Magazine




Multi Pallet

Tool Magazine

Chain-type 60-tool magazine are included in the standard specification. there is also a Matrix Magazine option, which will increase the capacity up to 161 / 233 / 311 or 389 tools (Capacity of Matrix Magazine).

40/60-tool magazine	80/116-tool magazine	120/160/176/236-tool magazine
---------------------	----------------------	-------------------------------

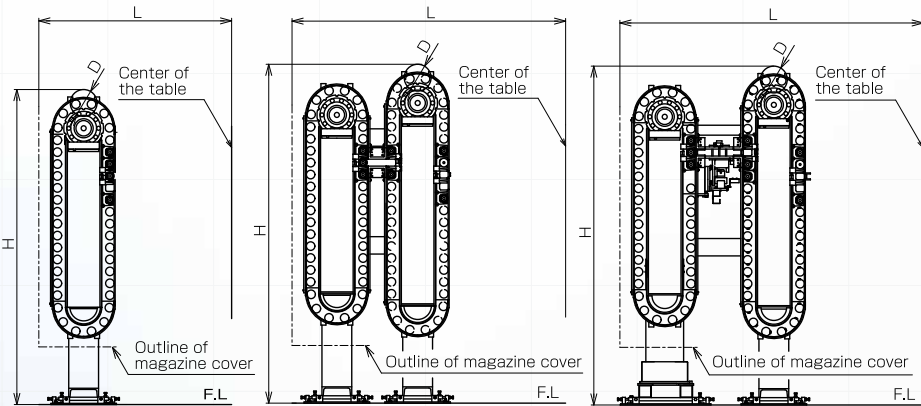

	HM-X6000			HM-X8000		
	L mm	H mm	D ² mm	L mm	H mm	D ² mm
40 tools [Std]	2005 (78.94)	3170 (124.80)		2130 (83.86)	3305 (130.12)	
60 tools [Opt]		4370 (172.05)			4265 (167.91)	
80 tools [Opt]		3410 (134.25)			3545 (139.57)	
116 tools [Opt]		4370 (172.05)	ø270 (dia.10.63)		4265 (167.91)	ø270 (dia.10.63)
120 tools [Opt]		3410 (134.25)			3545 (139.57)	
160 tools [Opt]		3410 (134.25)			3545 (139.57)	
176 tools [Opt]		4370 (172.05)			4265 (167.91)	
236 tools [Opt]		4370 (172.05)			4265 (167.91)	

*1: Number of storable tools of the 40/60-tool magazine refers to a total number of tools including the tool in the spindle i.e. subtract one from the above for the actual number of tools storable in the magazine.
*2: The dimension D means the maximum tool diameter applied to the tool with no tools placed in the pots in the tool magazine that adjoin the pot designated to the tool. It is ø115 mm in any of the above cases unless both pots have no tools.

ATC [Automatic Tool Changer]

The ATC unit offers stable tool changes and amazing durability. The speed variable ATC function included in the standard specification enables smooth tool change in the use of heavy or large-diameter tool as the ATC turning speed is reduced automatically according to the setting made at the time of registration of the relevant tool.




	HM-X6000	HM-X8000
Maximum tool diameter	ø270mm (dia.10.63") <small>*ø115mm(dia.4.53") unless adjoining pots have no tools</small>	Maximum ø270mm (dia.10.63") <small>*ø115mm(dia.4.53") unless adjoining pots have no tools</small>
Maximum tool length	500mm (19.69")	Maximum 400mm (15.75")
Maximum tool mass	25kg (55lbs) <small>(in the case of slow turning)</small> <small>*20kg(44lbs) when turning at normal speed</small>	Maximum 25kg (55lbs) <small>(in the case of slow turning)</small> <small>*15kg(33lbs) when turning at normal speed</small>

APC [Automatic Pallet Changer]


The direct-turn 2APC unit is included in the standard specification. The automatic multi pallet changer and the FMS are available optionally. The units are compatible with the through-pallet jig interface and the rotary joint type jig interface.

HM-X6000	8APC	5520x8760mm(217.32"x344.88")
HM-X8000	6APC laid in line	6000x13400mm(236.22"x527.56")
	6APC laid crosswise	6130x12100mm(241.34"x476.38")
	8APC laid in line	6000x15000mm(236.22"x590.55")
	8APC laid crosswise	7730x12100mm(304.33"x476.38")

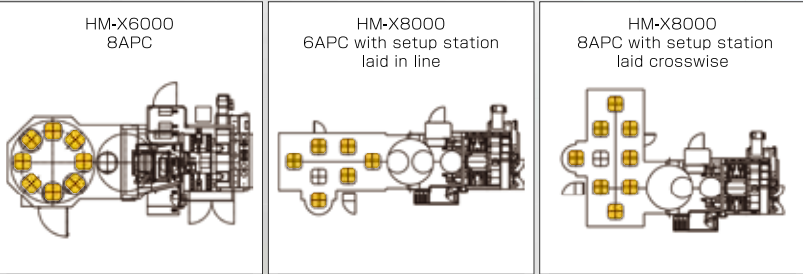

5-axis Support Technologies

5-axis Control Function

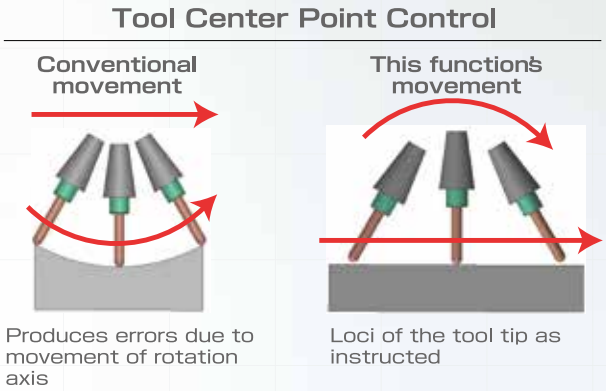


Linear interpolation while changing the angle of the tool normally requires complicated machining data using minute segments as shifts in the direction of the axis of the tool need to be instructed according to the change in the tools angle. By using the Tool Center Point Control, location of the tool tip are as instructed regardless of the instructions for the rotation axis. As speed of the tool tip is constant (designated speed), further high-quality surfacing can be achieved.

5-axis Indexing Function

Inclined Surface Indexing (Machining) Command
HM-X6000 [Opt] HM-X8000 [Std]

The inclined surface indexing (machining) commands allow setting as desired the surface to be machined by using the newly defined coordinate system (feature coordinate system). It enables efficient creation of the machining programs similar to the programming for the normal 3-axis machining centers.

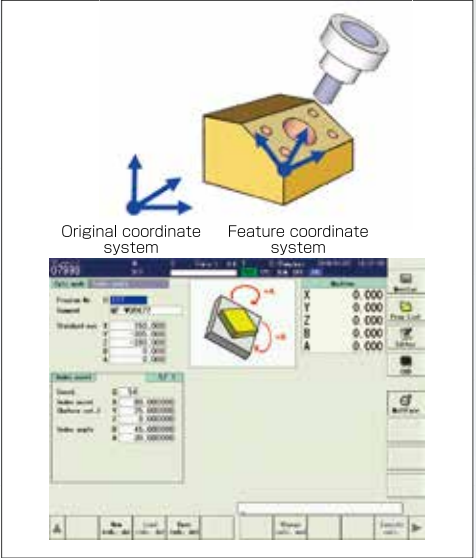

MULTI-FACER II


When indexing the planes to be machined on the 5-axis machining centers, it may take time for setting the workpiece origins. Those workpiece origins can be set easily by using the MULTI-FACER II that enables creating the programs for indexing easily without requiring calculations.

5-axis Measurement Function



When 5-axis machining. One key component to high accuracy 5 axis machining is ensuring that the center position of the rotation axis has been set correctly. If wrong this significant effects the machining accuracy. OKK has reduced the error that can be generated by the operator with our A⁵ System, (OKK's Original software) that allows the operator to easily measure and set the center of rotation axes automatically with use of this software. A⁵ System improves upon the already high-accuracy 5-axis indexing capability and simultaneous 5-axis machining.

Note: This function does not adjust the accuracy of linear 3 axes.

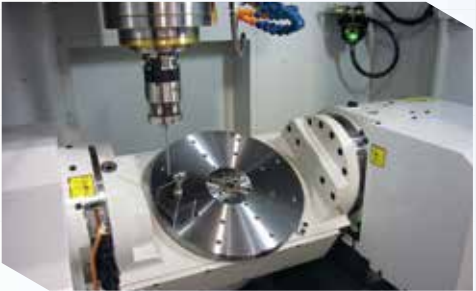

Specifications

Item		Unit	HM-X6000	HM-X8000
Travel on X axis (Column: right / left)		mm	1050(41.34")	1300(51.18")
Travel on Y axis (Spindle head: up / down)		mm	900(35.43")	1100(43.31")
Travel on Z axis (Pallet: back / forth)		mm	820(32.28")	1550(61.02")
Travel on A axis (Pallet tilting / head tilting)		deg	-110 to 20	-110 to 40
Travel on B axis (Pallet turning)		deg	360	
Distance from table top surface to spindle center		mm	-170 to 730(-6.69" to 28.74")	60 to 1160(2.36" to 45.67")
Distance from table center to spindle nose		mm	150 to 970(5.91" to 38.19")	-500 to 1050(-19.69" to 41.34")
table (pallet) work surface area		mm	□600(□23.62")	□800(□31.50")
Max. workpiece weight loadable on table (Pallet)		kg	650(1433lbs) (Uniformly distributed load)	2000(4409lbs) (Uniformly distributed load)
Pallet top surface configuration			24×M16 tap	
Minimum index angle of table (pallet)		deg	0.001	
Minimum index angle of A axis		deg	0.001	
Table (Pallet) index time for 90 degrees		sec	0.6	1.2
A axis index time for 90 degrees		sec	1.7	2
Spindle speed		min ⁻¹	35 to 12000	
Number of spindle speed change steps			Electrical two-speed control (MS)	
Spindle nose (Nominal number)			7/24 taper, No. 50	
Spindle bearing bore diameter		mm	φ100(φ3.94")	
Rapid traverse rate	XYZ:	mm/min	54000(2126ipm) (Opt.75000(2953ipm))	48000 (1890ipm)
	AB:	min ⁻¹	A:10 B:33.3	A:8.3 B:16.7
Cutting feed rate	XYZ:	mm/min	1 to 40000 (0.04 to 1575ipm)*1	1 to 20000 (0.04 to 787ipm)*1
	AB:	min ⁻¹	A:0.1~5 B:0.1~5	A:0.1~8.3 B:0.1~5.6
Type of tool shank (Nominal number)			JIS B 6339 BT50	
Type of pull stud (Nominal number)			OKK only 90°	
Tool storage capacity		tools	60*2	
Maximum tool diameter		mm	φ115(φ4.53")(With no tools in adjacent pots φ270(φ10.63"))	
Maximum tool length (from the gauge line)		mm	500(19.69")	400(15.75")
Maximum tool weight		kg	Normal turning:20(44lbs)/ Slow turning:25(55lbs)	Normal turning:15(33lbs)/ Slow turning:25(55lbs)
Maximum tool moment		N·m	29.4(21.7ft.lbs)	
Tool selection method			Address fixed random method	
Tool exchange time (cut-to-cut)		sec	4.2	5.7
Pallet change method			Direct-turn method	
Pallet exchange time (New JIS evaluation time)		sec	18.0	22.0
Spindle motor		kW	30(40HP) (30-min rating)/ 25(34HP) (continuous rating)	45(60HP) (25%ED) / 30(40HP) (30-min rating) / 26(35HP) (continuous rating)
Motor for tool clamp/unclamp unit		kW	0.75(1.0HP)	
Feed motor	XYZ:	kW	5.5(7.4HP)	X:5.0(6.7HP)×2 Y:14.0(18.8HP)×2 Z:6.0(8HP)
	AC:	kW	A:5.5(7.4HP) B:4.5(6.0HP)	A:7.0(9.4HP) C:4.5(6.0HP)
Hydraulic pump motor		kW	1.5(2.0HP)	
Motor of oil cooler for spindle and feed system (compression/discharge)		kW	1.7(2.3 HP)/0.75(1.0HP)	1.1(1.5HP)/0.4×2(0.54HP)
Coolant pump motor		kW	60Hz:1.2(1.6HP) 50Hz:0.7(1.0HP)	
Power supply AC200V±10% 50/60±1Hz AC220V±10% 60±1Hz *4*3		kVA	67	82
Compressed air supply		Mpa,ℓ/min[ANR]	0.4 to 0.6(58 to 87psi)*4, 500(132gpm)*5	
Hydraulic unit tank capacity		ℓ	20(5gal)	
Spindle and feed system cooling oil tank capacity		ℓ	70(18.5gal)	20(5.3gal)×2
Magazine lubricating oil tank capacity		ℓ	1 (0.3gal)	4.2(1.1 gal)
Coolant tank capacity		ℓ	400(106gal)	800(211.3gal)
Machine height		mm	4370(172.0")	4290 (168.90")
Required floor space		mm	5055(199.0")×6700(263.8)(Opt. lift up chip conveyor)	5433(213.9")×7755(305.3)(Opt.lift up chip conveyor)
Machine weight		kg	20000(44100lbs)	30000(66138lbs)
Operating environment temperature		℃	5 to 40	

*1: Available under the HQ or hyper HQ control.
*2: The number of stored tools refers a total number of tools including the one installed on the spindle i.e. subtract one from the above for actual number of tools stored in the tool magazine.
*3: When the supply voltage is 220VAC, the supply frequency of 60Hz only is applicable.
*4: Purity of compressed air should be class 3.5.4 or higher class of ISO 8573-1/JIS B8392-1 standard.
*5: Specified is the compressed air supply flow rate for standard specification machines. When optional specifications such as an air blow nozzle are added, add the corresponding air supplyrequirement.
Note: Machining accuracy can be affected by the environment where the machine is installed. Please make sure to install the machine in an appropriate environment.


Standard and optional Accessories

Standard: Option: Not available:


		Item	HM-X6000	HM-X8000
Spindle taper and pull stud	Taper	BT50		
	Tow faces contact holder	HSK-A100		
		BT type		
	Pull stud	OKK90° MAS I MAS II		
Maximum spindle speed	BT50	Gear	8000min ⁻¹	22/18.5kW
		MS	8000min ⁻¹	22/18.5kW
		12000min ⁻¹	30/25kW	45/30/26kW
Table/	Table	BRT(Built-in rotary table)	Least Index 0.001°	
	Rapid feed rate 75m/min			
Magazine	BT50 HSK-A100	40MG	40MG×1	
		60MG	60MG×1	*1
		80MG	44MG+40MG	
		116MG	60MG×2	*1
		120MG	44MG+40MG×2	
		160MG	44MG+40MG×3	
		176MG	60MG×3	*1
		236MG	60MG×4	*1
		161MG/233MG/311MG/389MG	Matrix magazine	
	Magazine Interruption function			
	Magazine operation panel			
	Tool holder remove by foot pedal		Standard for BT50/HSK two face contact holder	
For Automatic pallet transfer and pallet	APC	2APC		
		Multiple APC	6-pallet APC 8-pallet APC	
	Pallet	Tapped type Pallet T-Slot type Pallet Additional Pallet	24-M16 screw	
For Coolant and Ghip conveyor	Coolant tank	Standard Coolant tank		
	Chip ejection	Lift up chip conveyor	Hinge/Scraper/Scraper with magnet/Drum	
		Coil conveyor	Bed left and right	
		Chip flow coolant	Bed left and right	
	Coolant	Spindrecoolant nozle		
		Ceiling Shower		
		Coolant shower gun		
		Air blow		
		Oil mist air blow		
		Coolant through spindle	2MPa/7MPa	
		Air through spindle		
		Oil hole		
		Oil skimmer		
		Mist collector		
	For accuracy	Dubble anchor pretension ball screw	With core cooling ball screw	
		Oil cooler for spindle and feed system		
		Linear scale feed back	XY-axis or XYZ-axis	
Other accessories	Rotary encoder		AB-axis	
		Coolant cooler unit		
	Signal tower lamp		Three lamp with buzzer	
	Working light		LED light	
	Workpiece automatic measurement Tool length measurement and break detection Tool break detection	Touch sensor T0	Manual measurement	
		Touch sensor T1-A	Workpiece automatic measurement	
		Touch sensor T1-B	Workpiece automatic measurement/Tool length automatic measurement/Tool break detection	
		Touch sensor T1-C	Tool length automatic measurement/Tool break detection	
	Automatic grease lubrication unit Automatic oil lubrication unit for MG and ATC part Foundation parts for machine anchoring	Tool break detection in magazine	Contact type or laser type	
			XYZ-axis/ball screw	
	Rotary window		Bond anchoring method At operation door	

MG: Tool magazine unit *1: It is not available for the HSK-A100.


HM-X 6000 Machine Dimensions

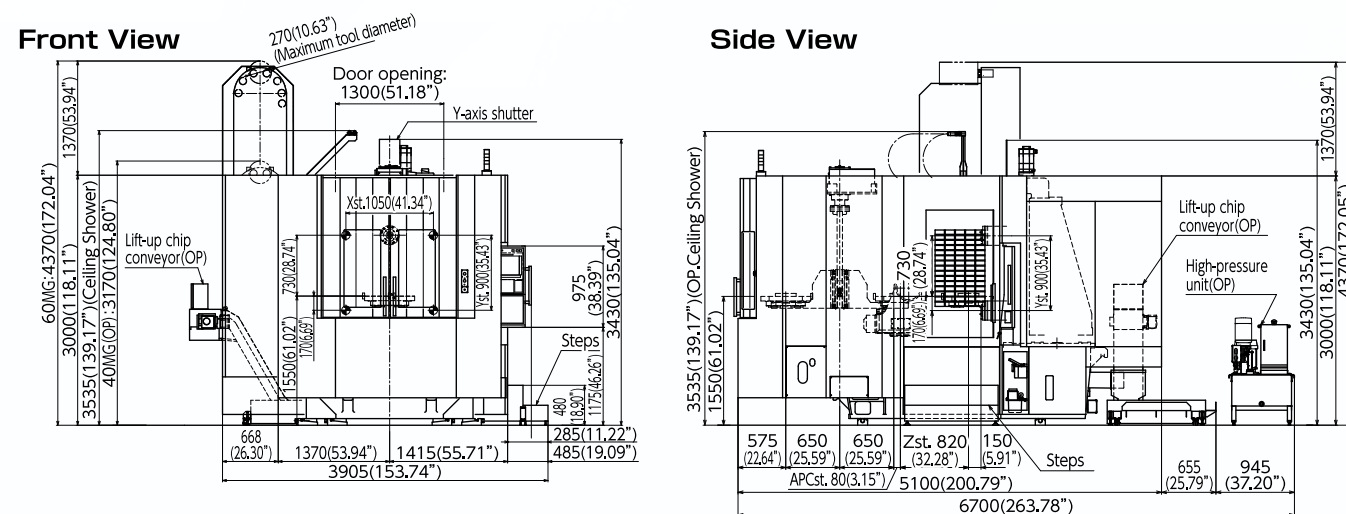


Floor Space Diagram

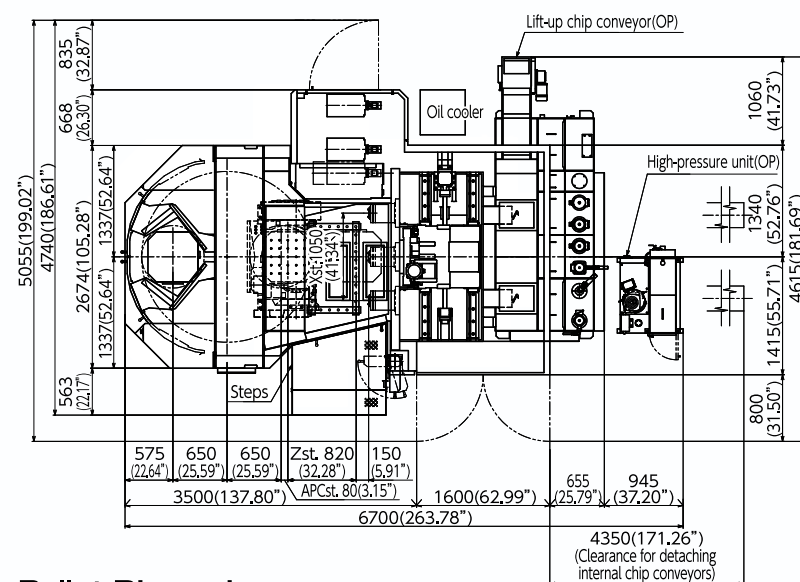


Pallet Dimensions

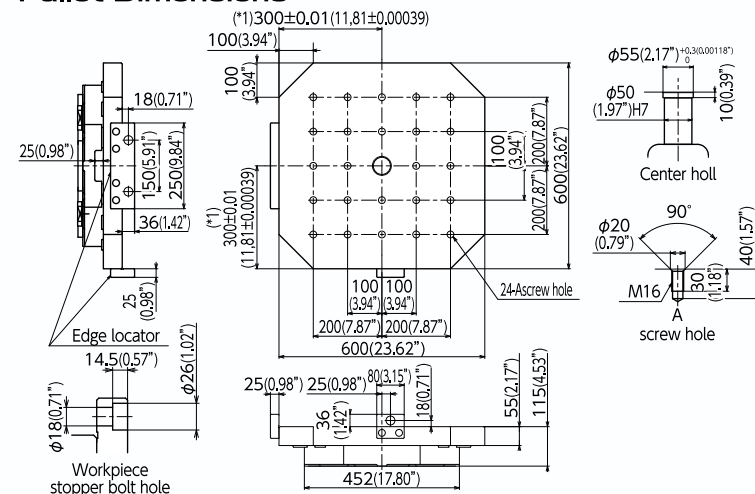

XYZ axes travel diagrams

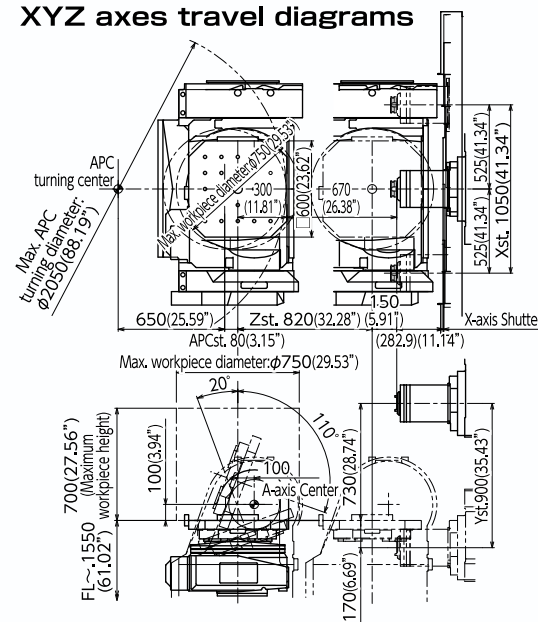


Restrictions on tool

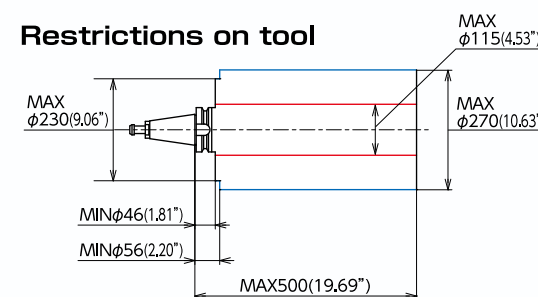


Note: The dimension marked with (*1) is the dimension between the center of rotation and the edge locator.


HM-X 8000 Machine Dimensions

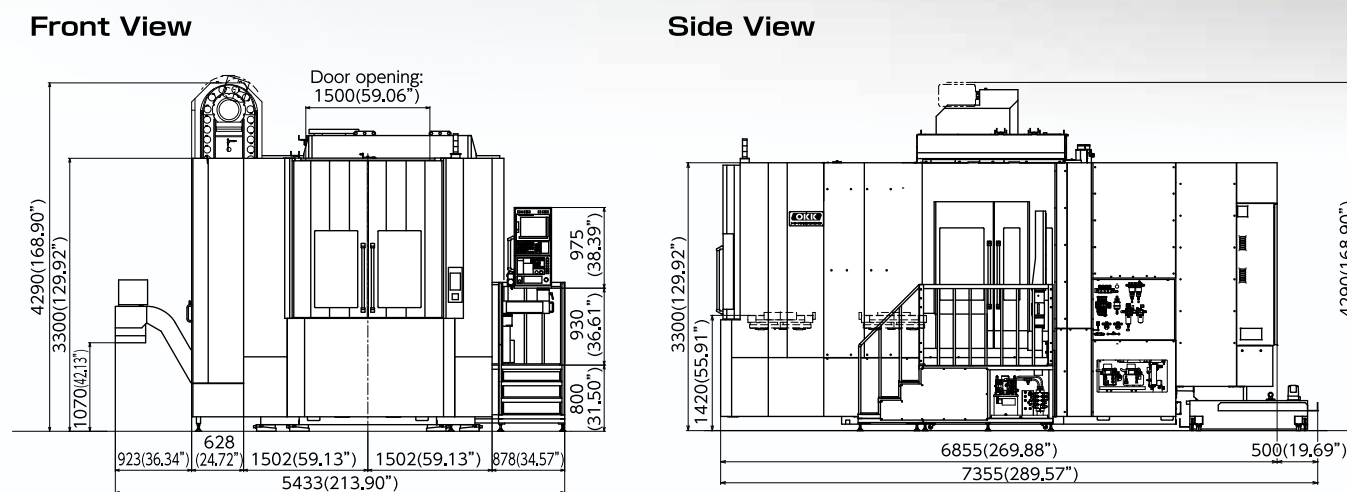


Floor Space Diagram

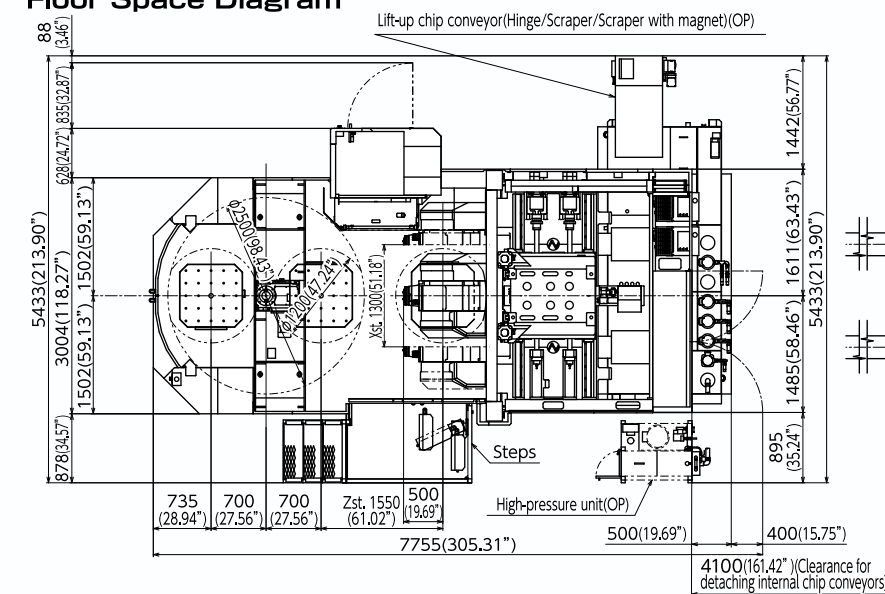


Pallet Dimensions

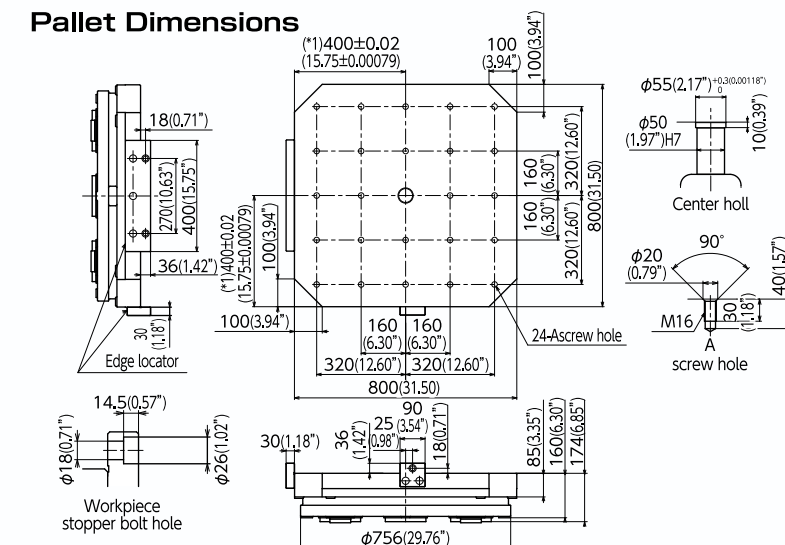

XYZ axes travel diagrams

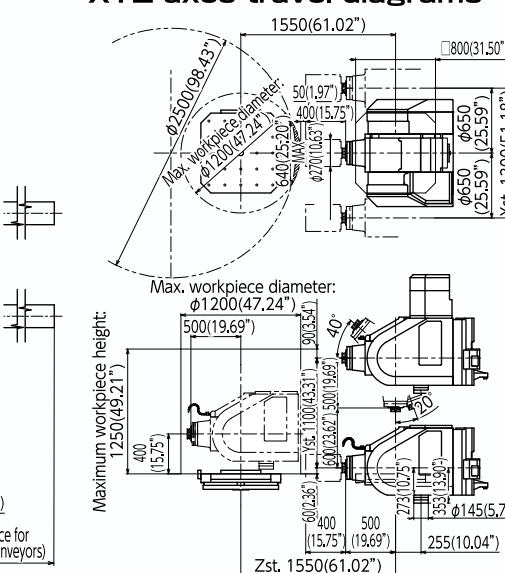

Restrictions on tool

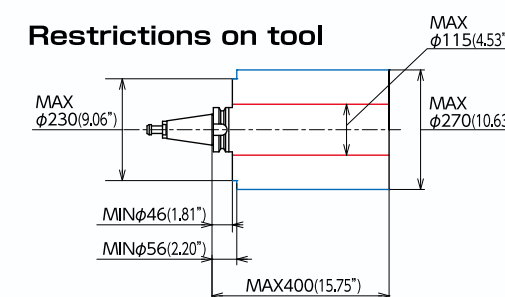

Note: The dimension marked with (*1) is the dimension between the center of rotation and the edge locator.

F31i-B5(WindowsCE Open CNC)

Standard Specification	HM-X6000	HM-X8000
Controlled axes: 5 (X, Y, Z, A, B)	○	○
Simultaneously controlled axes: 5 axes	○	○
Least input increment: 0.001mm / 0.0001"	○	○
Max.programmable dimension: ±999999.999mm / ±39370.0787"	○	○
Absolute / Incremental programming: G90 / G91	○	○
Decimal point input / Pocket calculator type decimal point input	○	○
Inch / Metric conversion: G20 / G21	○	○
Program code: ISO / EIA automatic discriminaton	○	○
Program format: FANUC standard format	○	○
Nano interpolation(internal)	○	○
Positioning: G00	○	○
Linear interpolation: G01	○	○
Circular interpolation: G02 / G03(CW / CCW) (including Radius designation)	○	○
Cutting feed rate: 6.3-digit F-code, direct command	○	○
Dwell: G04	○	○
Manual handle feed: manual pulse generator 1 set (0.001, 0.01, 0.1mm)	○	○
Rapid traverse override: 0 / 1 / 10 / 25 / 50 / 100%	○	○
Cutting feed rate override: 0 to 200%(every 10%)	○	○
Feed rate override cancel M49 / M48	○	○
Rigid tapping: G84, G74(Mode designation: M29)	○	○
Part program storage capacity: 160m(64KB)	○	○
No. of registered programs: 120	○	○
Part program editing	○	○
Background editing	○	○
Extended part program editing	○	○
15" color LCD / QWERTY key MDI	○	○
Clock function	○	○
MDI (Manual Data Input)operation	○	○
Memory card / USB interface	○	○
Spindle function: 5-digit S-code direct command	○	○
Spindle speed override: 50 to 150%(every 5%)	○	○
Tool function: 4-digit T-code direct command	○	○
ATC tool registration	○	○
Auxiliary function: 3-digit M-code programming	○	○
Multiple M-codes in 1 block: 3 codes(Max. 20 settings)	○	○
Tool length offset: G43, G44/G49	○	○
Tool diameter and cutting edge R compensation: G41, G42/G40	○	○
Tool offset sets: 99 sets	○	○
Tool offset memory C	○	○
Manual reference position return	○	○
Automatic reference position return: G28/G29	○	○
2nd reference position return: G30	○	○
Reference position return check: G27	○	○
Automatic coordinate system setting	○	○
Coordinate system setting: G92	○	○
Machine coordinate system: G53	○	○
Workpiece coordinate system: G54 to G59	○	○
Local coordinate system: G52	○	○
Program stop: M00	○	○
Optional stop: M01	○	○
Optional block skip: /	○	○
Dry run	○	○
Machine lock	○	○
Z-axis feed cancel	○	○
Auxiliary function lock	○	○
Program number search	○	○
Sequence number search	○	○
Program restart	○	○
Cycle start	○	○
Auto restart	○	○
Single block	○	○
Feed hold	○	○
Manual absolute on/off: parameter	○	○
Sub program control	○	○
Canned cycle: G73, G74, G76, G80 to G89	○	○
Mirror image function: parameter	○	○
Automatic corner override	○	○
Exact stop check/mode	○	○
Programmable data input: G10	○	○
Custom macro	○	○
Graphic display	○	○
Backlash compensation for each rapid traverse and cutting feed	○	○
Smooth backlash compensation	○	○
Memory pitch error compensation(interpolation type)	○	○
Skip function	○	○
Tool length manual measurement	○	○
Emergency stop	○	○
Data protection key	○	○
NC alarm display / alarm history display	○	○
Machine alarm display	○	○
Stored stroke check 1	○	○
Load monitor	○	○
Self-diagnosis	○	○
Absolute position detection	○	○
Manual Guide i (Basic)	○	○
Stored stroke check 2, 3 (for OKK use)	○	○
3rd & 4th reference position return (for OKK use)	○	OP

Standard Specification		HM-X6000	HM-X8000
Helical interpolation	PK1	○	○
Part program storage capacity: 1280m(512KB)(1000 in total)	PK1	○	○
Tool offset sets: 200 sets in total	PK1	○	○
Addition of workpiece coordinate system(48 sets in total): G54.1 P1 to P48	PK1	○	○
Programmable mirror image	PK1	○	○
Tool life management: 256 sets in total	PK1	○	○
Run hour and parts count display	PK1	○	○
Tool center point control for 5 axis machining	PK2, 3	○	○
Inverse time feed	PK2, 3	○	○
Unidirectional positioning: G60	PK2, 3	○	○
Data server: ATA card(1GB)	PK2, 3	○	○
Coordinate system rotation: G68, G69		○	○
Instruction of inclined plane indexing	PK3	OP	○
Manual feed for 5 axis machining	PK3	—	○
Tool length compensation along tool vector	PK3	—	○
Straightness compensation	PK3	—	○

Optional Specification			
Least input increment: 0.0001mm / 0.00001"		□	□
FS15 tape format		□	□
Cylindrical interpolation		□	□
Hypothetical axis interpolation		□	□
Spiral/Conical interpolation		□	□
Smooth interpolation		□	□
NURBS interpolation		□	□
Involute interpolation		□	□
One-digit F code feed		□	□
Handle feed 3 axes(Standard pulse handle is removed)		□	□
Part program storage capacity: 320m(128KB)(250 in total)		□	□
Part program storage capacity: 640m(256KB)(500 in total)		□	□
Part program storage capacity: 2560m(1MB)(1000 in total)		□	□
Part program storage capacity: 5120m(2MB)(1000 in total)		□	□
Part program storage capacity: 10240m(4MB)(1000 in total)		□	□
Part program storage capacity: 20480m(8MB)(1000 in total)		□	□
RS232C interface: RS232C-1CH		□	□
Data server: ATA card(4GB)		□	□
Spindle contour control(Cs contour control)		□	□
Tool position offset		□	□
3-dimensional cutter compensation		□	□
Tool offset sets: 400 sets in total		□	□
Tool offset sets: 499 sets in total		□	□
Tool offset sets: 999 sets in total		□	□
Addition of workpiece coordinate system(300 sets in total): G54.1 P1 to P300		□	□
Machining time stamp		□	□
Optional block skip: Total 9		□	□
Tool retract and return		□	□
Sequence number comparison and stop		□	□
Manual handle interruption		□	□
Optional chamfering / corner R		□	□
3-dimensional coordinate system conversion		□	□
Interruption type custom macro		□	□
Addition of custom macro common variables: 600		□	□
Figure copy		□	□
Scaling: G50, G51		□	□
Chopping		□	□
Playback		□	□
Automatic tool length measurement: G37 / G37.1		□	□
Addition of tool life management sets: 1024 sets in total		□	□
High-speed skip		□	□
Manual Guide i (Milling cycle)		□	□

Original OKK Software			
Machining support integrated software (incl. Help guidance, etc.)		STD	STD
Tool support		STD	STD
Program Editor		STD	STD
EasyPRO		STD	STD
A ⁺ System(A) Measure rotation center		OP	OP
A ⁺ System(B) Measure rotation center and location error		—	—
Work Manager		OP	OP
HQ control		STD	STD
Hyper HQ control mode B	PK2, 3	STD	STD
5 Axis NC Option Package A (including the items with "PK2")		STD	—
5 Axis NC Option Package B (including the items with "PK3")		—	STD
NC option package (including the items with "PK1")		STD	STD
Multi-FacerII		STD	STD
Special canned cycle (including circular cutting)		OP	OP
Cycle Mate F		OP	OP
Soft ScaleIIm		STD	STD
Touch sensor TO software		OP	OP
Tool failure detection system (Soft CCM)		OP	OP
Adaptive control (Soft AC)		OP	OP
Automatic restart at tool damage		OP	OP

Functions for Operability and Environmental Measures

ECO Measures

ECO Sleep Function

In order to reduce wasted power, air, etc., the power saving mode is activated when the machine has been in the standby state for a specified period of time. During the power saving mode, servos, chip convers, etc. are turned off. The mode is cancelled automatically when the setup operation is finished (door is closed).

LED Lamp

LED lamps are used for reduction in heat generated by the lighting system and for saving power.



Inverter Oil Cooler

HM-X8000 **Std.**

Inverter oil cooler provides limited temperature variation and realizes energy consumption.



Improved Operability

15-inch Operation Panel

- 15-inch color liquid crystal display improves visibility of the information displayed on the screen as well as operability.
- Not only operability but simplicity has been taken into account for the operation panel. The operation panel has a QWERTY keyboard similar to the PCs'keyboards.
- The OKK's original screens for the setup operations and operational support are contained.















F31i-B

lift-up type chip conveyors **Opt.**

Compatibility of lift-up type chip conveyors with chip types

◎: Most suitable ○: Usable △: Conditionally usable ×: Not usable —: Not applicable

Type of chip conveyor			Hinged		Scraper		Magnet scraper		Scraper with drum filter		Magnet scraper with drum filter				
Use of coolant oil			Used	Not used	Used	Not used	Used	Not used	Used	Not used	Used	Not used			
Type of chips	Magnetizable chips	Steel	Short curl		◎	◎	○	○	◎	◎	○	—	◎	—	
			Spiral		◎	◎	△*2	△*2	△*2	△*2	×	—	×	—	
			Long		◎	◎	×	×	×	×	×	—	×	—	
			Needle shape		×	△*1	×	○	○*3	○	○	—	◎	—	
			Powder and small lump		×	△*1	×	○	○*3	○	○	—	◎	—	
	Cast iron	Needle shape		×	△*1	×	○	○*3	○	○	—	◎	—		
		Powder and small lump		×	△*1	×	○	○*3	○	△*3	—	◎	—		
		Non-magnetizable chips	Aluminum	Short curl		×	◎	△*4	○	—	—	◎	—	◎	—
				Spiral		○	◎	○	○	—	—	△*5	—	△*5	—
				Long		○	◎	○	○	—	—	△*5	—	△*5	—
	Needle shape				×	△*1	×	○	—	—	◎	—	◎	—	
	Powder and small lump				×	△*1	×	○	—	—	◎	—	◎	—	

*1: Minute chips can enter the conveyor through a gap on the hinged plate. Therefore, inside the conveyor needs to be cleaned frequently.

*2: Scraper can easily catch long chips. Therefore, shortening the chips (for example by using the step feed) or removing the chips is required if left un maintained the drum filter may get damaged.

*3: When flow rate of the coolant is large, filters can be clogged with chips out of the conveyor case. Therefore, combined use of a magnet plate and frequent cleaning of filters is recommended.

This photo shows the hinged pan type chip conveyor (fixed type and tilting type chip buckets are available optionally).

