

# NTJ-100



**NAKAMURA-TOME PRECISION INDUSTRY CO., LTD.**

<http://www.nakamura-tome.co.jp>

Netsuno 15, Hakusan city, Ishikawa, 920-2195 Japan

Phone : +81 76 273 8100 Fax : +81 76 273 4312

E-mail : [nt-jpn@nakamura-tome.co.jp](mailto:nt-jpn@nakamura-tome.co.jp)

\* This catalog was published in June, 2016. Specifications, illustrations and data given herein are subject to change without notice.

\* The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export of the products are subject to an export license by the Japanese government.

**NAKAMURA-TOME**  
PRECISION INDUSTRY CO.,LTD.

# NTJ-100

Leading the industry in

Multitasking Technology

Nakamura-Tome

Innovation Technology  
Creating Value

# ULTIMATE

From diversified small lot production to mass production

## One-hit Machining

## MINIMIZED LEAD TIME

All in one as standard




- NT Work Navigator
- NT Collision Guard
- Airbag
- NT Manual Guide i
- NT Nurse
- NT-IPS
- NT Machine Simulation
- NT Multitasking Office (op.)





# B -axis

With milling-tools  
and Y-axis offered  
as standard equipment

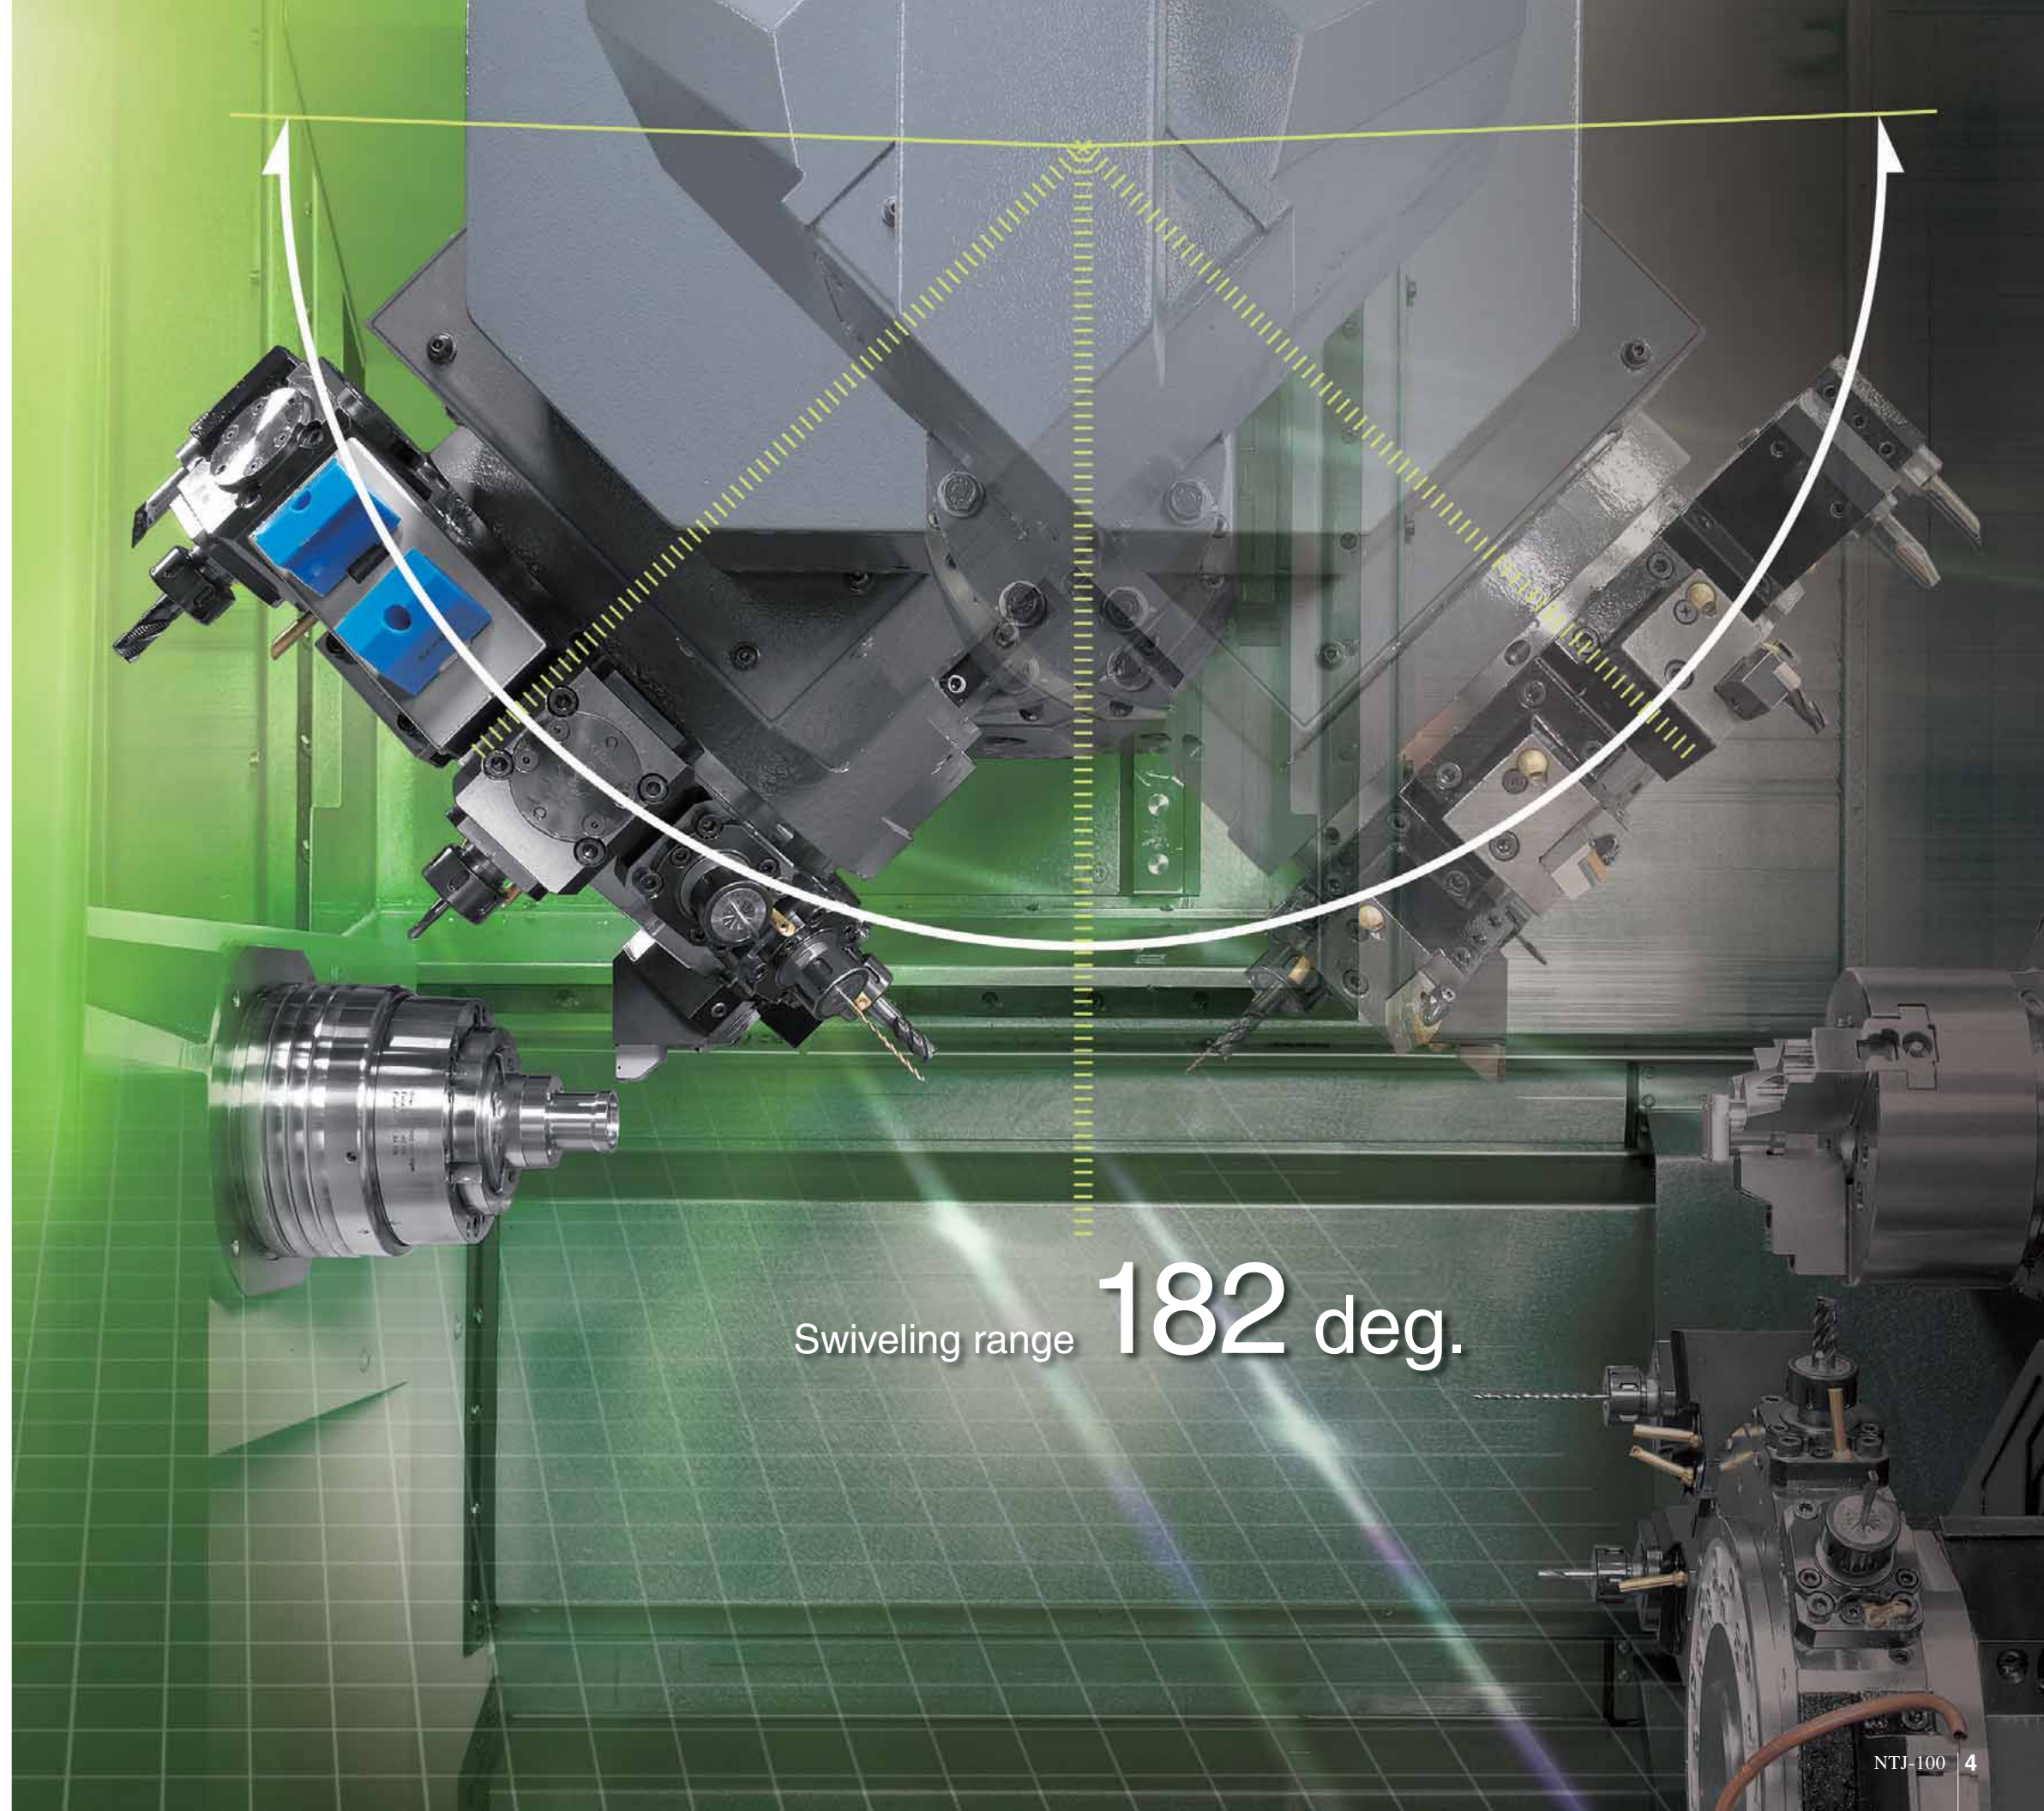

Swiveling range **182 deg.**



# 54

**24 + 24 + 6**

Up to 54 tool stations  
for Turning, 24 tool stations  
for milling tools



# M<sub>x2</sub>


Double Performance!

Milling-tool motor  
7.1 / 2.2kW × 2

# Y<sub>x2</sub>

Y-axis on upper and lower turret

Y-axis stroke  
Upper / 80mm, Lower / 65mm

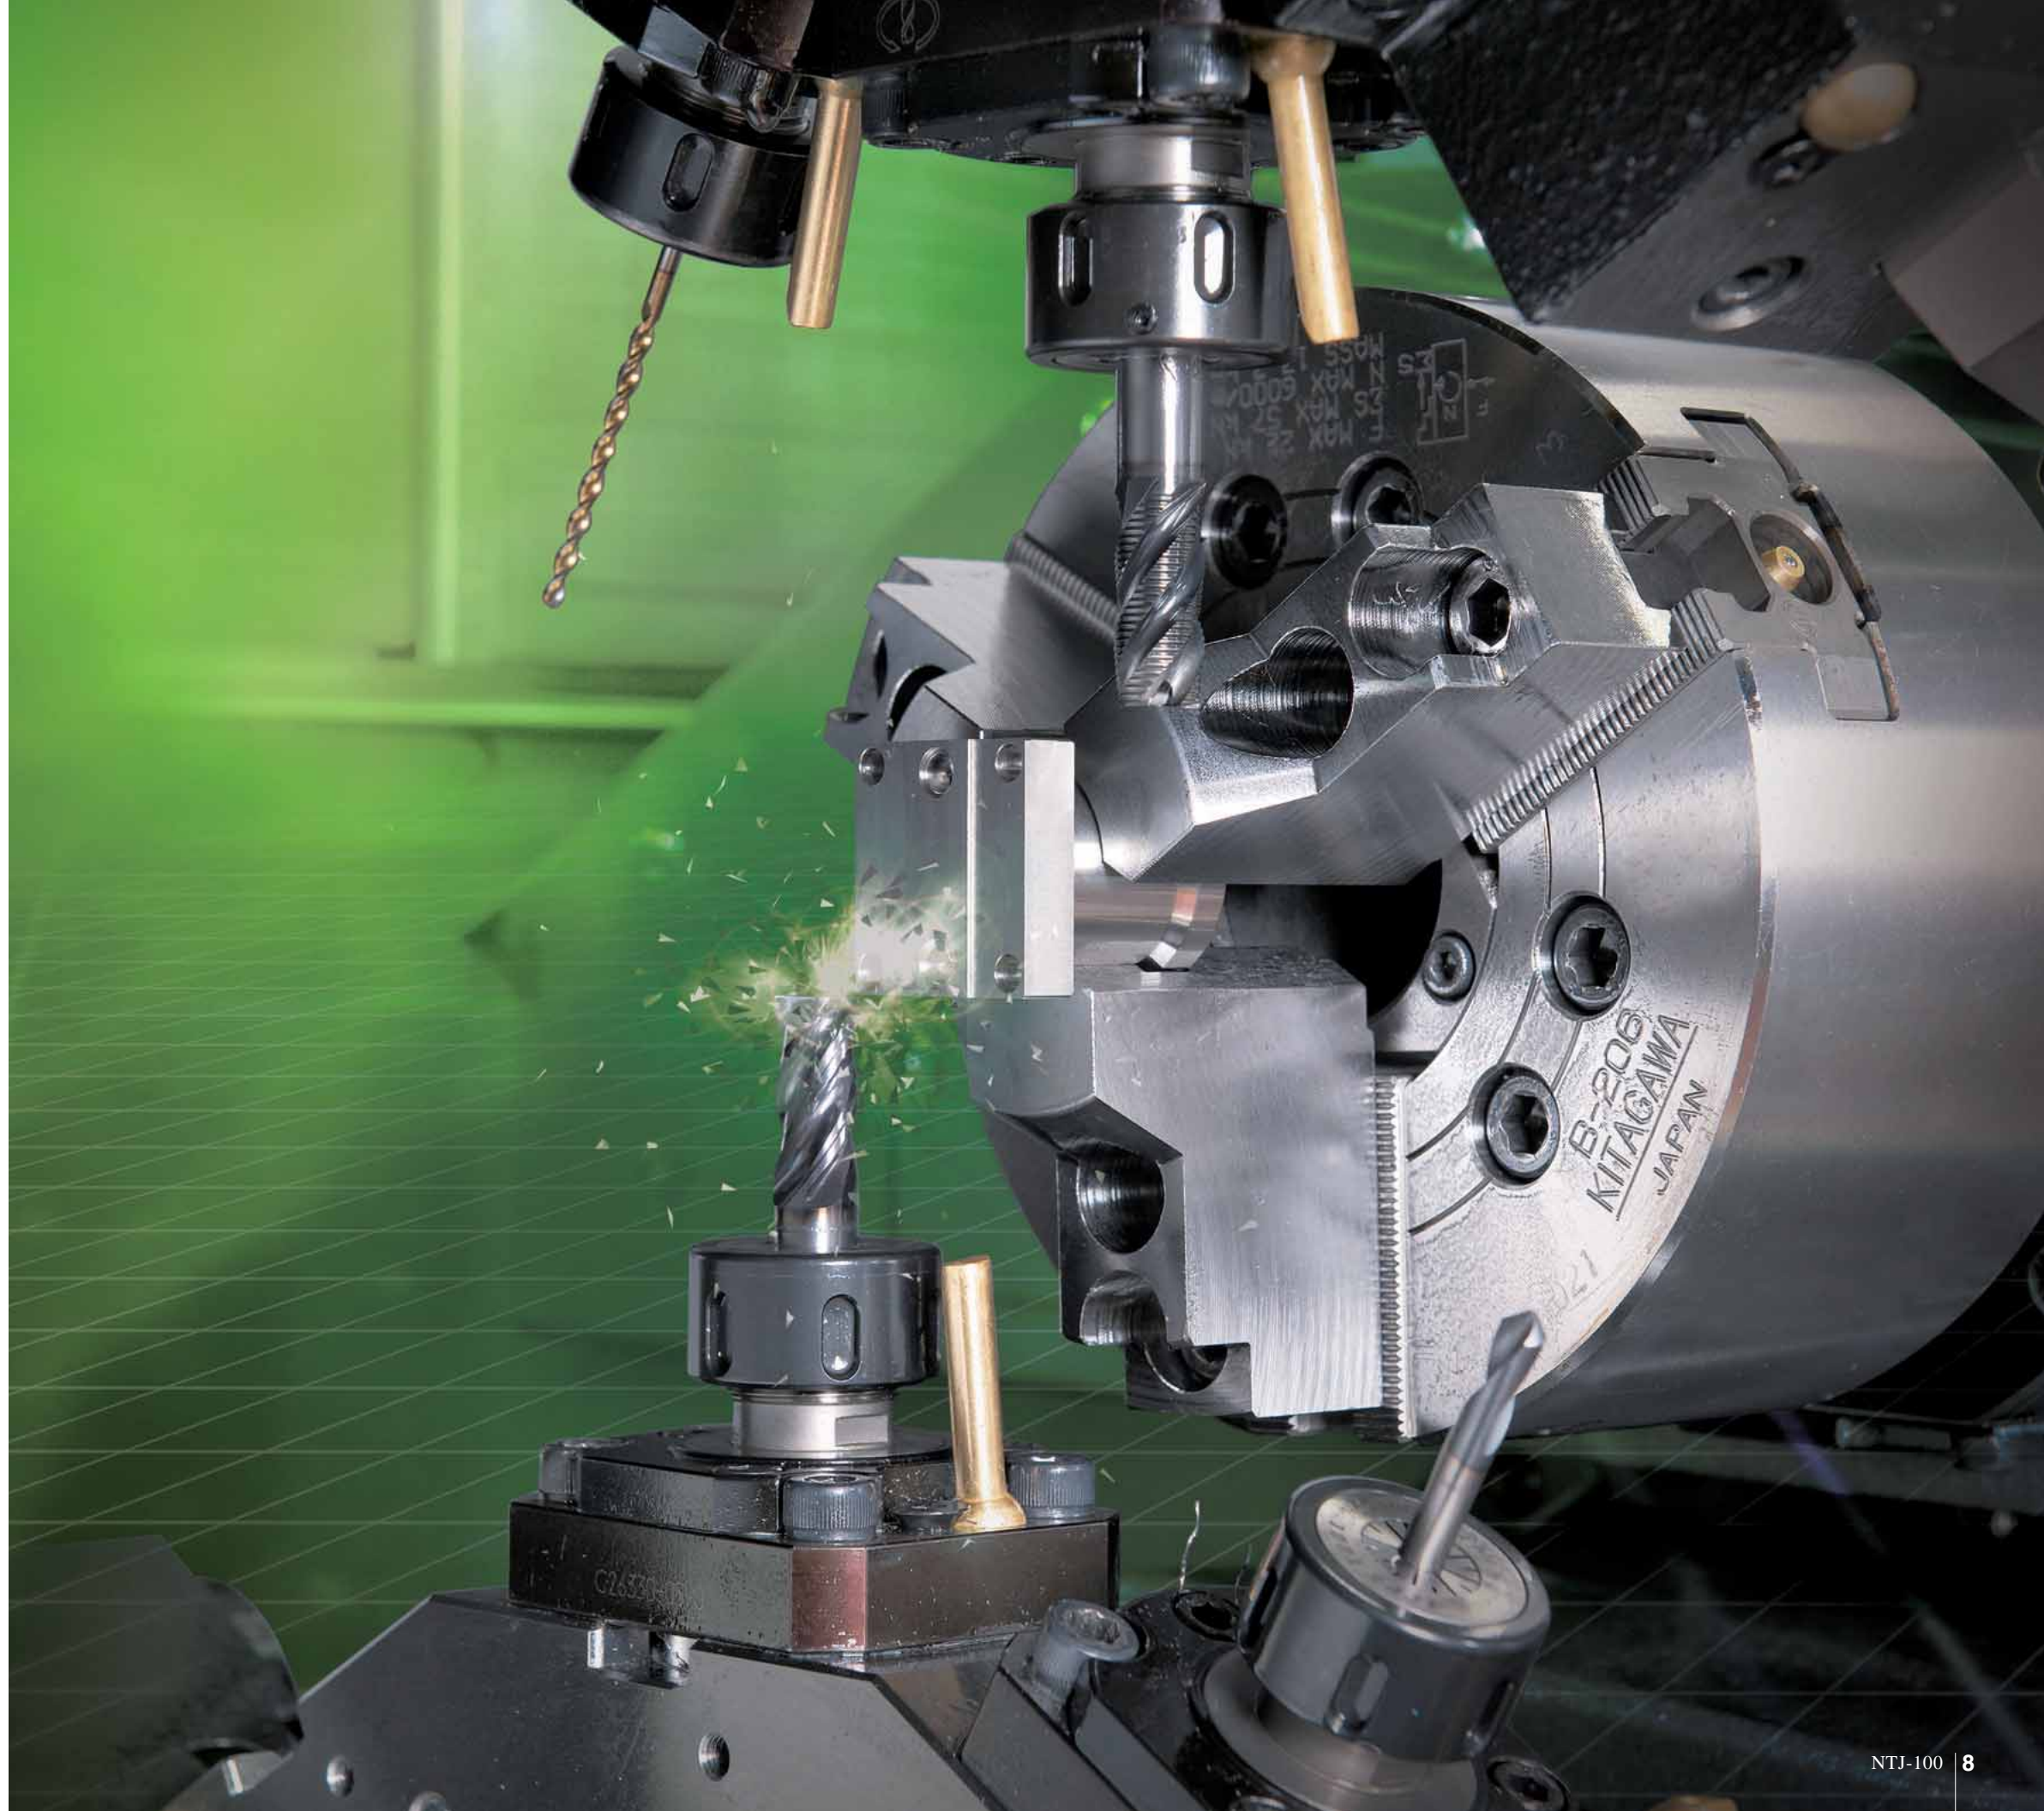



**NTJ-100**


**B-axis** Swiveling range : 182 deg.

**Productivity superior to that of a machining center!**




19"  
Color LCD  
Touch Panel

NT  
IPS






Capacity	42mm	51mm (op.)	65mm (op.)
Max. turning diameter / Max. turning length	175mm / 678mm		
Distance between centers	max.910mm / min.200mm		
Bar capacity	42mm	51mm	65mm
Chuck size	6" 165mm		
<b>Axis travel</b>			
Slide travel (X1/X2)	330mm / 127.5mm		
Slide travel (Z1/Z2/B2)	1040mm / 678mm / 710mm		
Slide travel (Y1/Y2)	±40mm / ±32.5mm		
<b>Left and Right spindles</b>			
Spindle speed	6,000min <sup>-1</sup>	5,000min <sup>-1</sup>	4,500min <sup>-1</sup>
Left spindle	11/7.5kW		
Right spindle	11/7.5kW		
<b>B1-axis (Swiveling axis for upper turret)</b>			
Swing range	182degree (±91degree)		
Swing mechanism	Servo motor + Roller cam		
Clamp function	Curvic coupling (5degree), Brake (0.001degree)		
<b>Upper turret</b>			
Number of tools	24 + 6		
Type of turret head	Dodecagonal drum turret		
Number of Indexing position	24		
Milling system	Individual rotation		
Number of milling stations	12		
Milling speed	6000min <sup>-1</sup>		
Milling motor power and torque	7.1/2.2kW 16/8N·m		
<b>Lower turret</b>			
Number of tools	24		
Type of turret head	Dodecagonal drum turret		
Number of Indexing position	24		
Milling system	Individual rotation		
Number of milling stations	12		
Milling speed	6000min <sup>-1</sup>		
Milling motor power and torque	7.1/2.2kW 16/8N·m		
<b>General</b>			
Floor space (L × W × H)	3,799mm × 2,100mm × 2,565mm		
Machine weight	10,000kg		

**54**  
stations  
High-rigidity turret

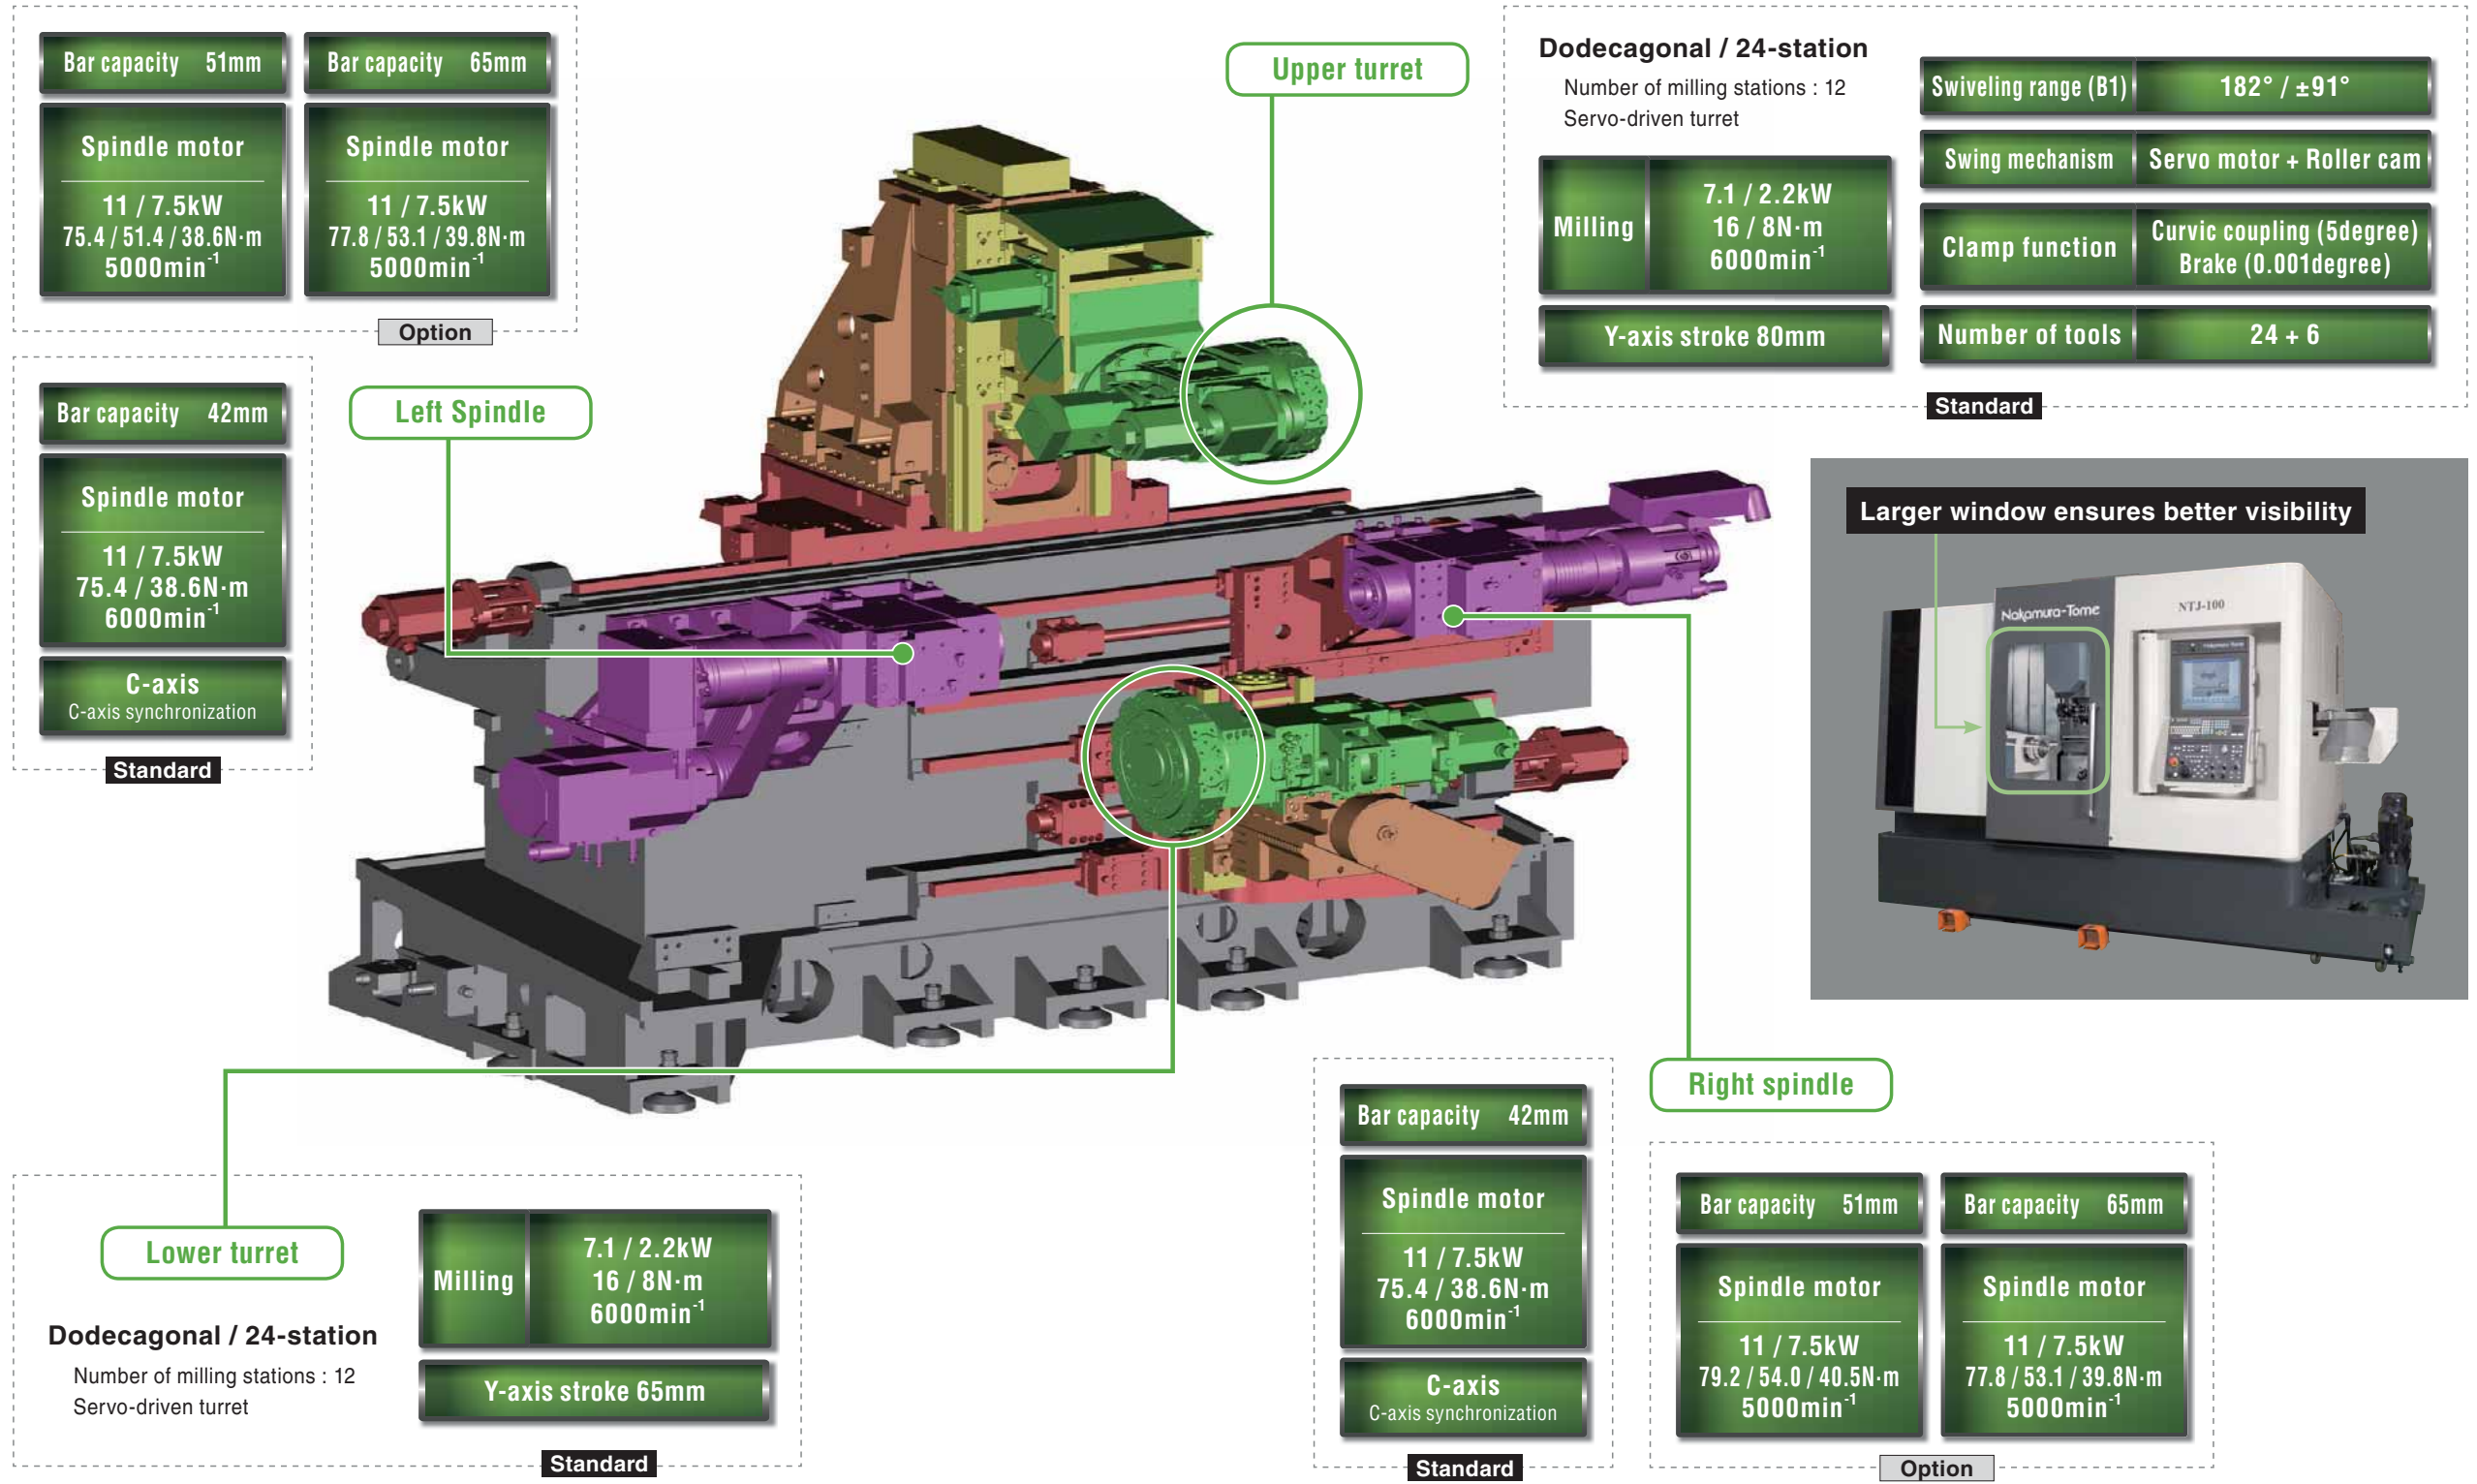



**Part catcher is a device to unload the workpiece and bring it out of the machine.**

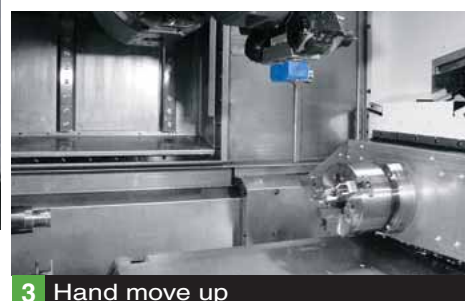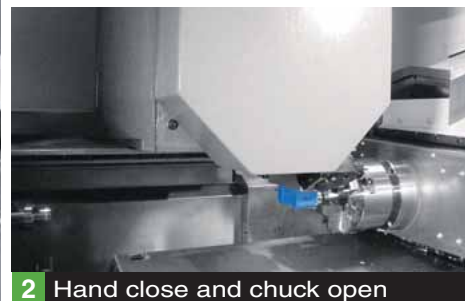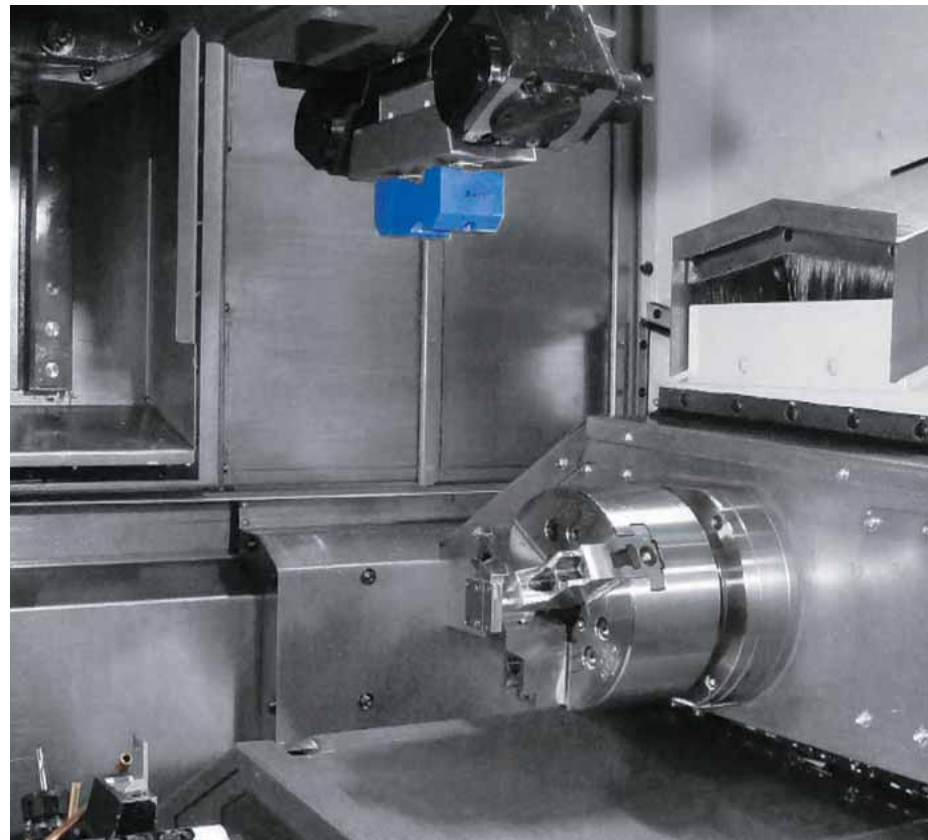

Patent pending

## ● Turret Servo Gripper type

Option

**Unloading Time 2.6 sec.**

\* 2.6 sec. is 1 to 3

Method	Hand	
Part size	Diameter	12 - 65mm
	Length	150mm
	Weight	3kg
Ejection method	Conveyor + Chute type	
Drive	Hand Open / Close	Used with Milling drive on Turret
	Traverse	Used with axis drive
	Shutter	Air Cylinder



## ● Part catcher A / Bucket type

**Unloading Time 4 sec.**

Option

Method	Swing-in Bucket	
Part size	Diameter	15 - 65mm
	Length	20 - 150mm
	Weight	3kg
Parts outlet	Stocker type Outlet chute type	

## ● Part catcher G / Gripper type

**Unloading Time 4.8 sec.**


Option

Method	Hand	
Part size	Diameter	12 - 65mm
	Length	15 - 200mm
	Weight	1.5kg
Ejection method	Conveyor + Chute type	






<b>Machining time</b>	8min.2sec.
<b>Material</b>	SUS303 (JIS)
<b>Blank</b>	Bar / 50mm




## Cell Production System

### 1 Risk of Investment


Ordinary Process - 6 machines



Streamlining




**NTJ-100**

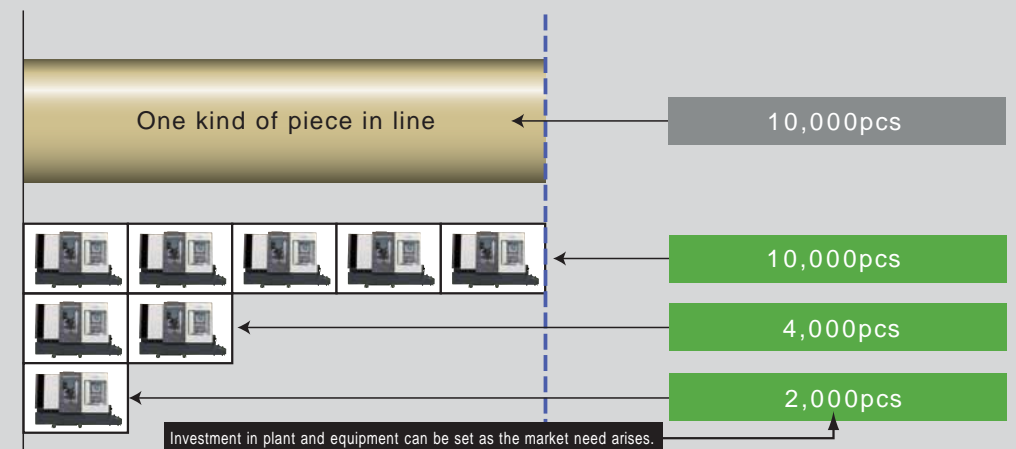


### 2 Scale of Production Space


Ordinary Process - 6 machines



Streamlining




**NTJ-100**

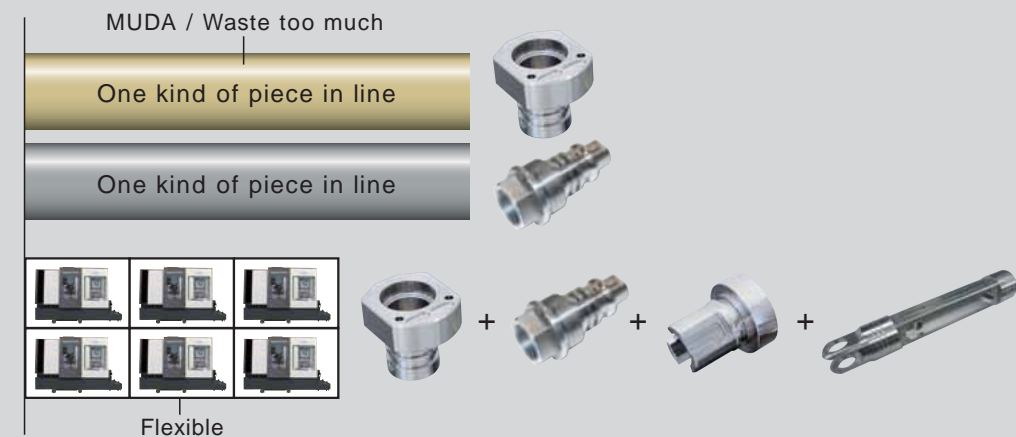


### 3 Reduce Chucking time for a line


Ordinary Process - 6 machines




Streamlining




**NTJ-100**

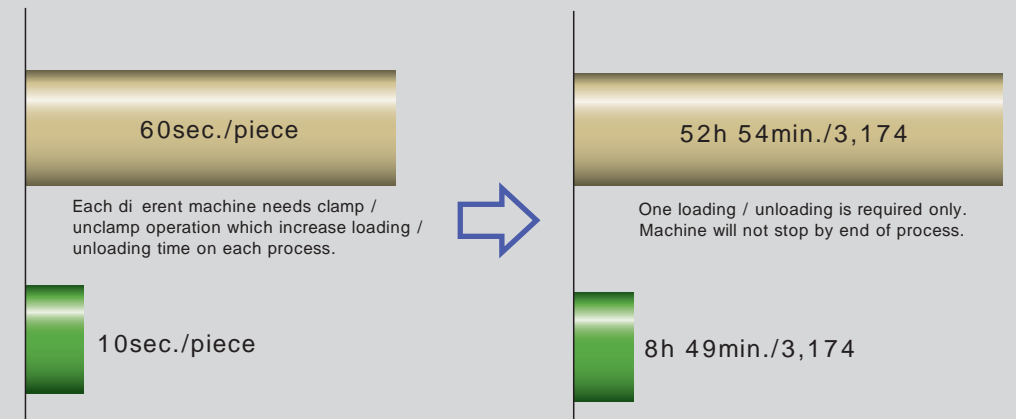


### ■ Cycle time comparison



**NTJ-100**





**ATC-Machine**

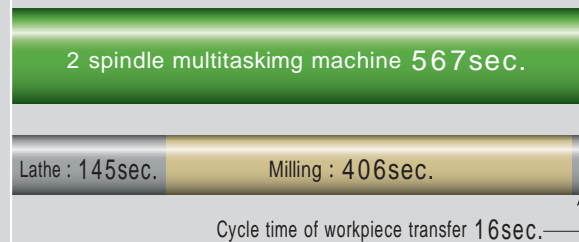

### ■ Production monthly


(20h x 25day x 85%)

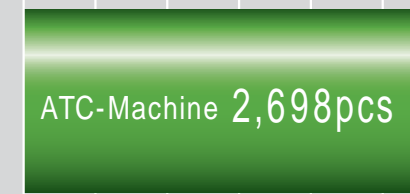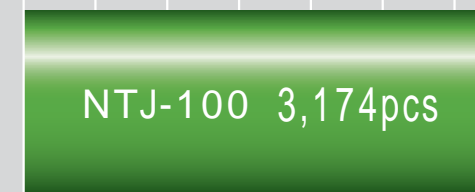


0 500 1000 1500 2000 2500 3000 (pce)



# NTJ-100 Energy Saving

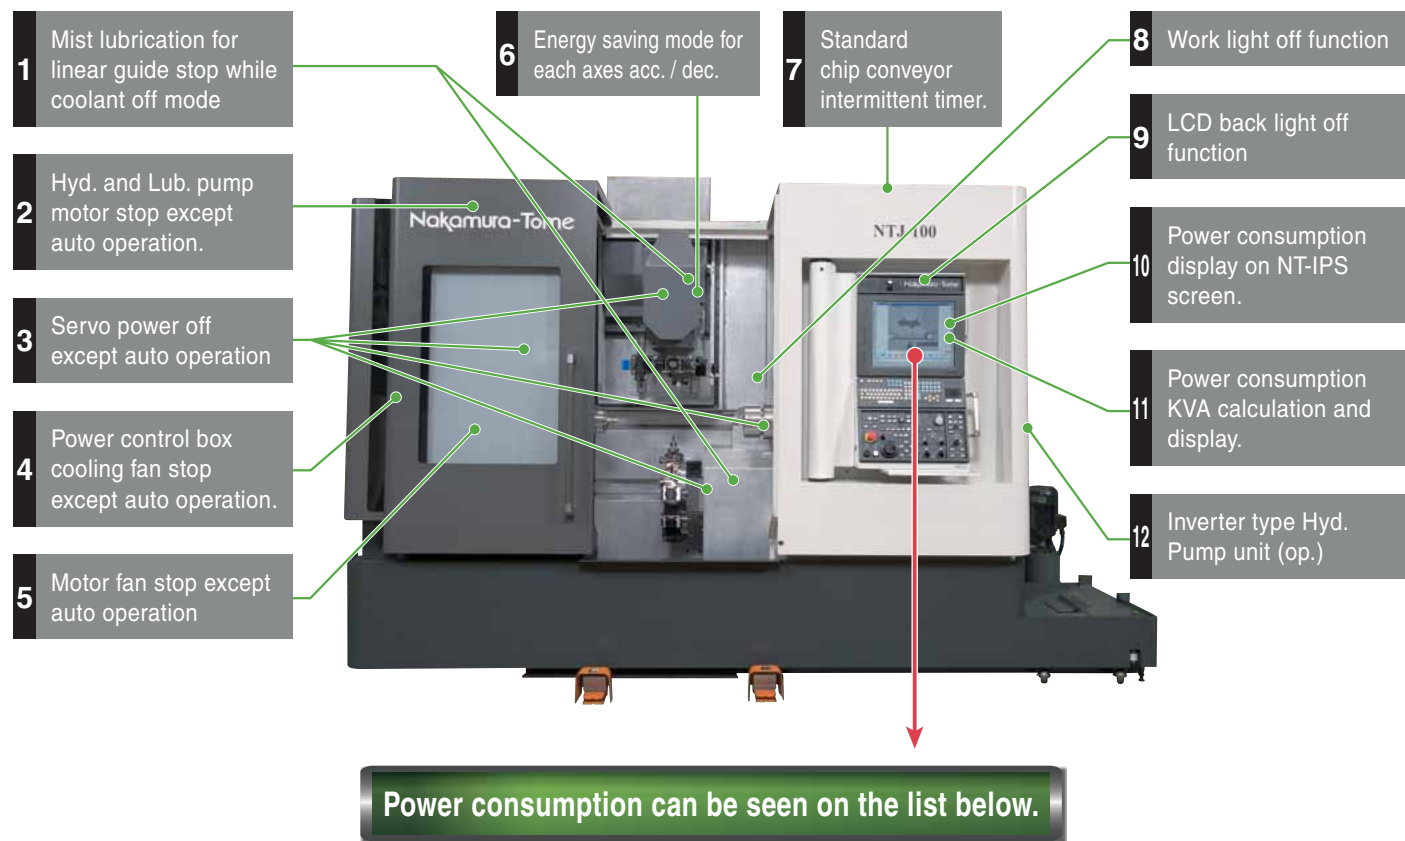

POWER Consumption history on NT-IPS screen.

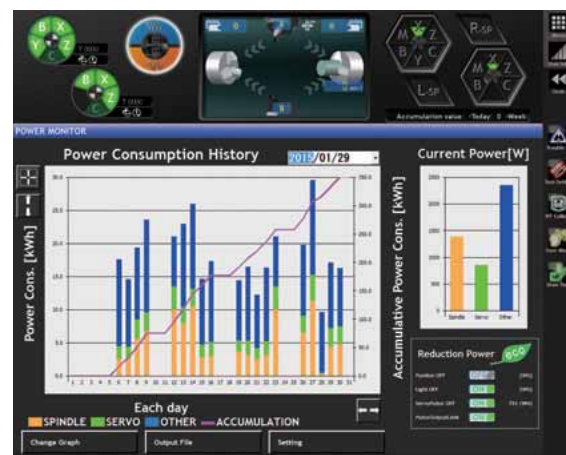

Power consumption history. Daily power consumption kWh each day as a bar graph. Accumulative power consumption as a line graph.



Power consumption history with numerical value. Spindle, Servo and Others are shown each day.

# NTJ-100 C-axis synchronization

Drastic idle time reduction

## C-axis

- C-axis indexing speed : 600min<sup>-1</sup>
- 180° indexing : 0.3sec.
- 360° indexing : 0.38sec.

Left and right C-axis synchronization for parts clamped by the left and right side chucks simultaneously



Picture 1 shows 1mm-thick rectangular segment in the middle. Picture 2 shows segment-fracture due to no C-axis synchronization

### Comparison of C-axis indexing time


With C-axis synchronization	Time
G00H180.	0.3sec.
Without C-axis synchronization	Time
G98G01H180.F4000	2.9sec.

In case of no C-axis synchronization  
 1) Open the chuck on one side or the other  
 2) Close the chuck, and then rotate the spindle slowly




### Turning Accuracy (Actual value)

**Roundness**  
**0.46  $\mu\text{m}$**

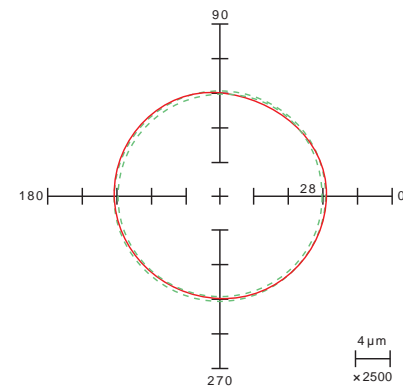


**Surface roughness (Ra)**  
**0.09  $\mu\text{m}$**

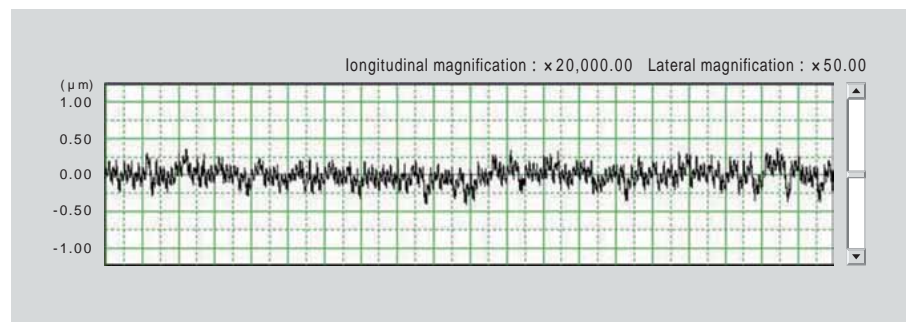


Cutting condition  
Spindle speed : 3,000min<sup>-1</sup>  
Feed : 0.05mm/rev  
Depth : 0.05mm  
Material : C3604( BSBM )  
Tool : Diamond nose R0.8

### NT thermal compensation

Every machine compensates for thermal growth by using a CNC software compensation technique for automatically correcting thermal errors. Deflections caused by thermal growth can be predicted, based on input from sensors placed on various components in the machine.

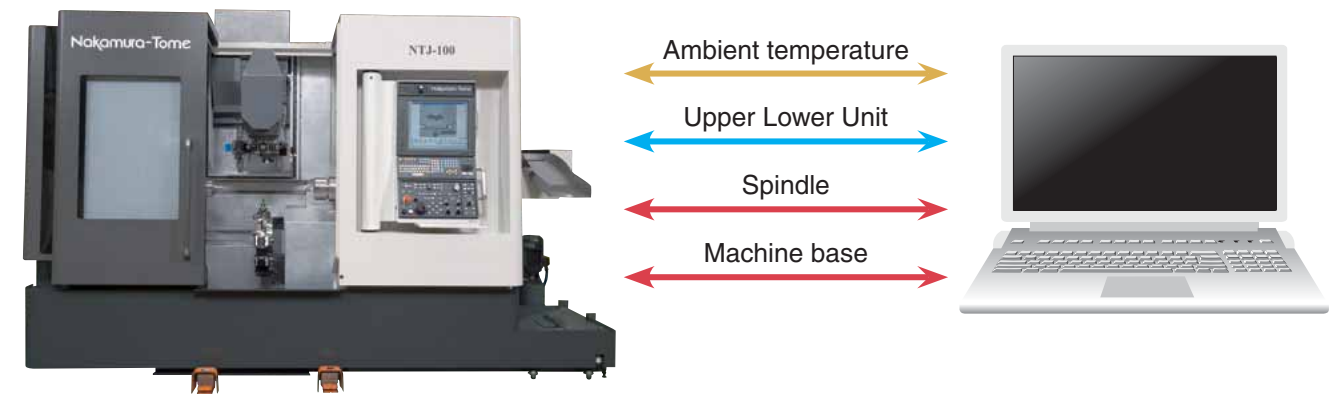


### Transferring Accuracy (Actual value)

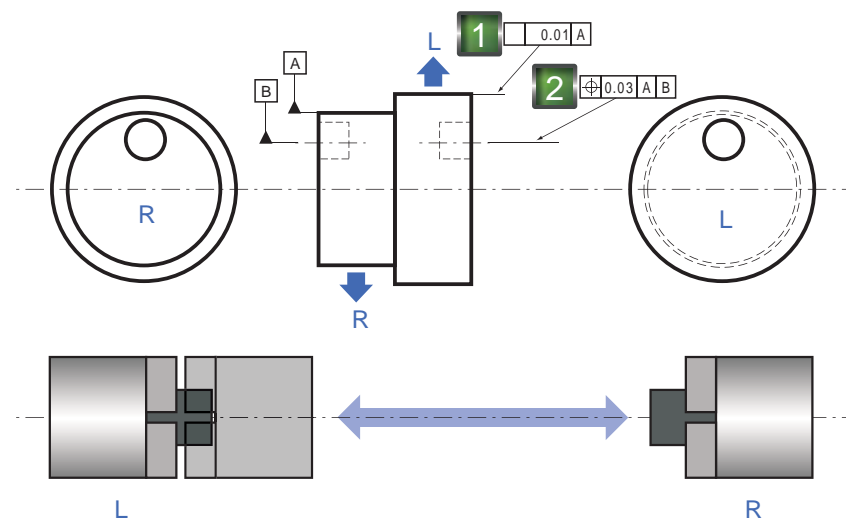

\* Actual value data indicated in this catalog is for reference, and may vary depending on cutting environment and specifications.

1 Outside turning coaxiality		2 Hole positioning accuracy	
Required accuracy	0.01 mm	Required accuracy	0.03 mm
Actual value	<b>0.005 mm</b>	Actual value	<b>0.009 mm</b>

### 8 $\mu\text{m}$ dimensional change (actual value)

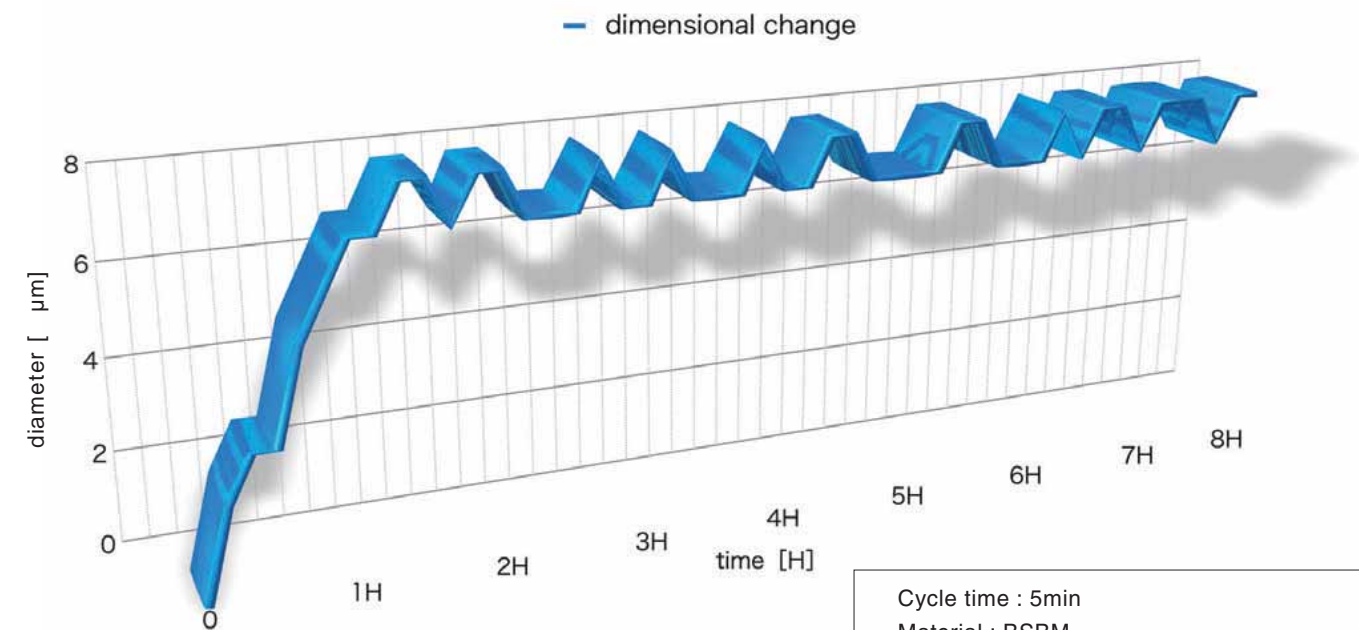


\* Actual value data indicated here is for reference. Depending on machining conditions and specifications, there is a possibility these values are not reached.

Cycle time : 5min  
Material : BSBM  
Coolant : Water soluble coolant  
Room temp change : less than 5 degrees



# Combining Turning and Milling Capabilities

From diversified small-lot production to mass production



## NTJ-100

By introducing faster motor acceleration / deceleration, machining efficiency was improved.




## NTJ-100

### Spindle motors

### Milling motor


dia. 42mm 11/7.5kW

Standard L / R Spindle motor  
Spindle speed : 6,000min<sup>-1</sup>

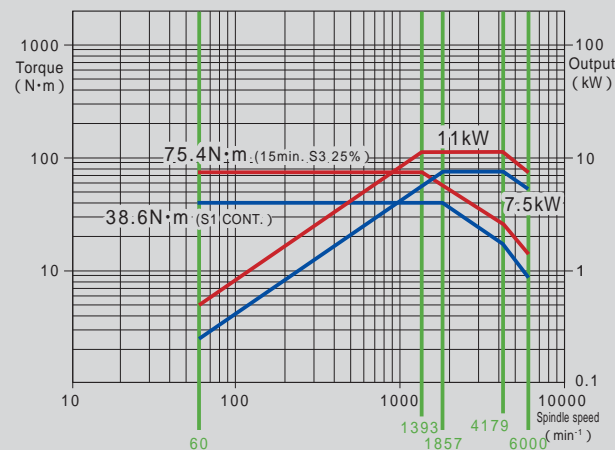


dia. 51mm 11/7.5kW

Option L Spindle motor  
Spindle speed : 5,000min<sup>-1</sup>

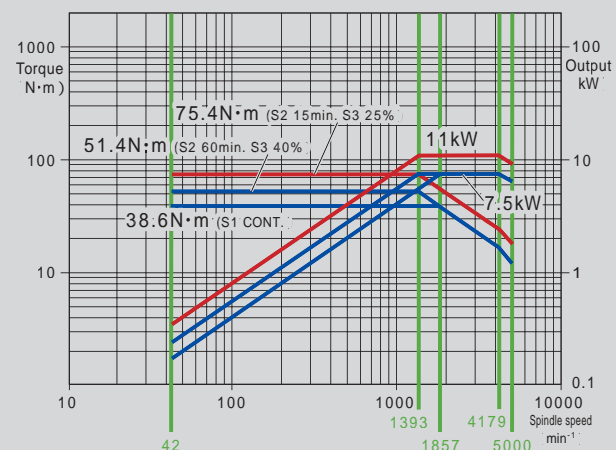



dia. 65mm 11/7.5kW

Option L / R Spindle motor  
Spindle speed : 4,500min<sup>-1</sup>

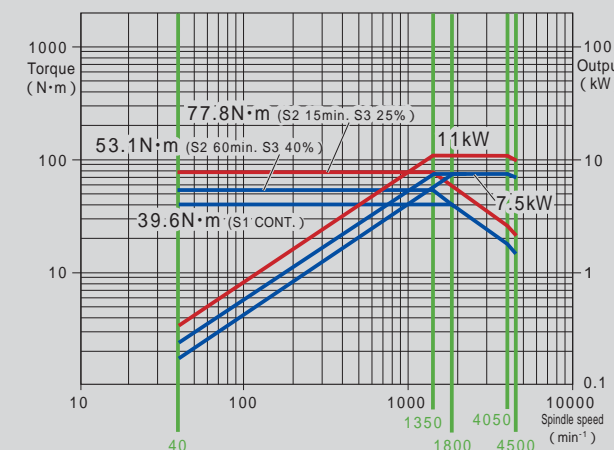


7.1 / 2.2kW

Standard Upper / Lower  
Milling speed : 6,000min<sup>-1</sup>

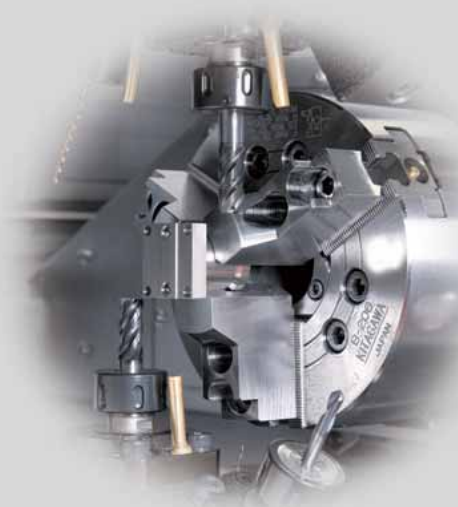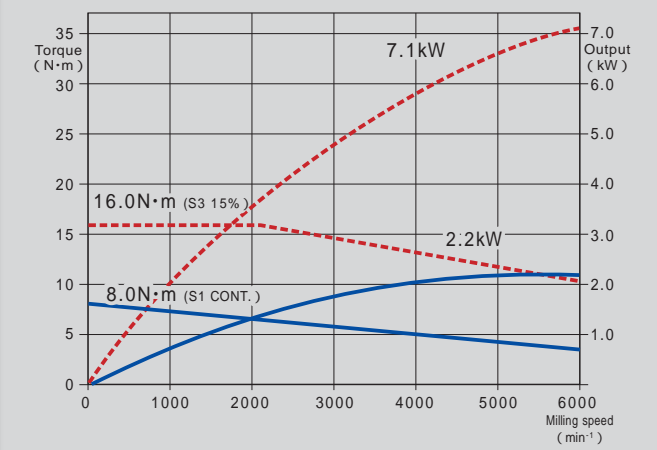

Option R Spindle motor  
Spindle speed : 5,000min<sup>-1</sup>

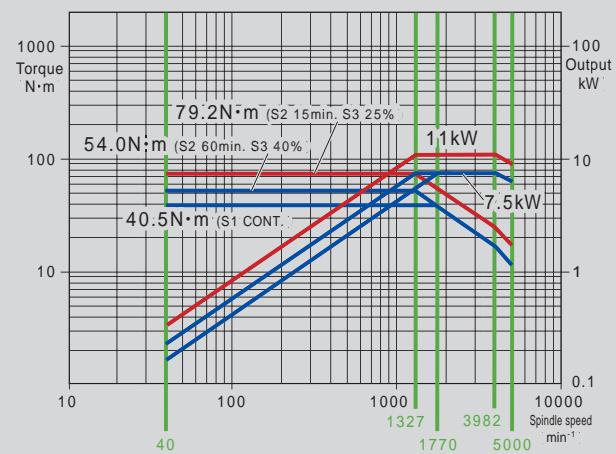







# Dual safety

NT Machine Simulation / NT Collision Guard + Airbag

# Dual safety



## Double safety features for maximum protection

NT collision Guard to avoid machine collision and Air bag function (Abnormal load detection) to minimize damage even in case of collision.

### NT Machine Simulation

Prevent the collision due to tooling, chuck, and program.




Simulation is performed to check the programs without running the machine. This helps prevent machine collisions due to programming or setup errors.

"Distance to go" and "Modal information" can be checked during with simulation.


Rapid feed and Cutting feed can be adjusted using override setting. It is possible to make Simulation of each process, or to use single block.

Process

Single block



Simulation of part machining. There are several view screen display settings, such as machine display, turret display and tooling display.



It is possible to choose between "with" or "without" program display. The color of the program block being simulated can be set to be displayed in a different color.



### NT Collision Guard



#### Preventive safety technology - Machine collisions are avoidable!

This function is available in automatic mode and manual mode. Collisions can be prevented, especially after modifying the program, or changing the tool geometry offset. Registered machine data, chucks, tools, holders, and parts are used to monitor the machine during automatic, manual or jog movement, and recognize in advance collisions before they happen. Even turret indexing is monitored to avoid collisions, drastically reducing machine collision risks, especially during set up.

• Model setup was simplified. Type of tool being indexed is automatically sorted out from the program, and the tool model can be selected from a displayed list.




### Airbag (Overload detection)

Nakamura-Tome machines will not break for the slightest collision, as other machines do. The function minimize damage in case of collision.


#### Even with barrier function, machine collisions may occur

Soft barrier function is not perfect. If wrong data is input, a collision will occur.

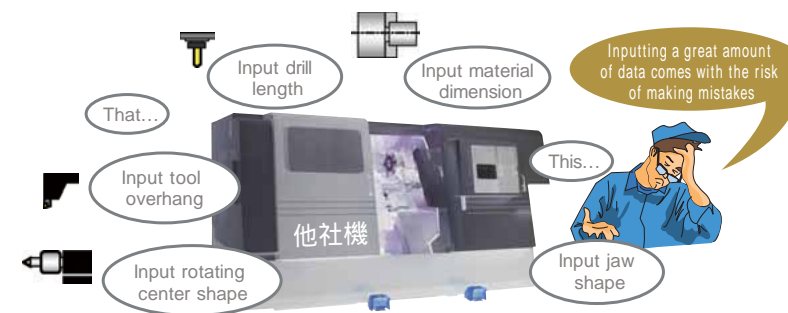

#### When unavoidable human error results in machine collision, there is no reason to panic.

All Nakamura-Tome machines are equipped with a safety feature called "airbag" (overload detection), which will greatly reduce the impact force and prevent heavy damage to the machine.

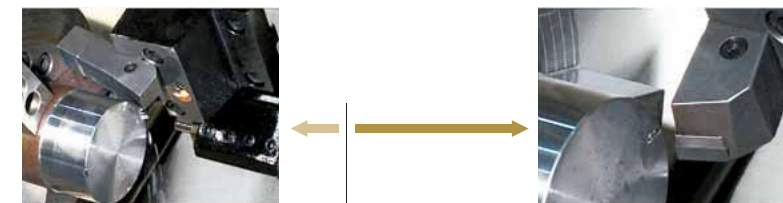


**Without Airbag**  
Machine will not be stop immediately. The slide continues to move even after collision.

**With Airbag**  
**Retraction within 0.008 sec**  
Crash!  
Within 8 milliseconds after the crash, servo motor-feeding direction is reversed and the machine stops in EMG mode.



Video

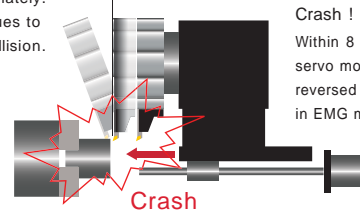

\* This feature does not mean zero impact.

### NT Work Navigator

#### New Navigator for X-axis and Y-axis


X Y Z B C

#### • Advanced NT Work Navigator !

Navigation function is expanded to also include the X and Y-axis. Coordinate Recognition can made the part's outer surface in the X or Y-Axis direction.


#### • No fixtures required

Machining parts with non-round shapes, such as forgings or castings requires that the raw part coordinates be recognized by the CNC control. In order to achieve this without requiring extra cost or additional options, the NT Navigator is used. It works just by touching the part with a simple inexpensive probe (mostly round bar mounted on a tool holder) and using the torque control feature of the servo-motor, which is to record required coordinates in the CNC. The NT Navigator is a cost cutting feature in multitasking machines, eliminating the need for positioning fixtures and special clamping devices.

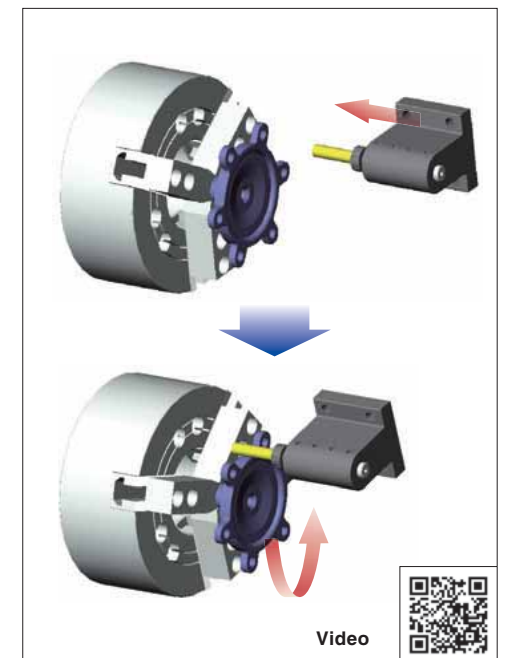





## Slide Travel Range

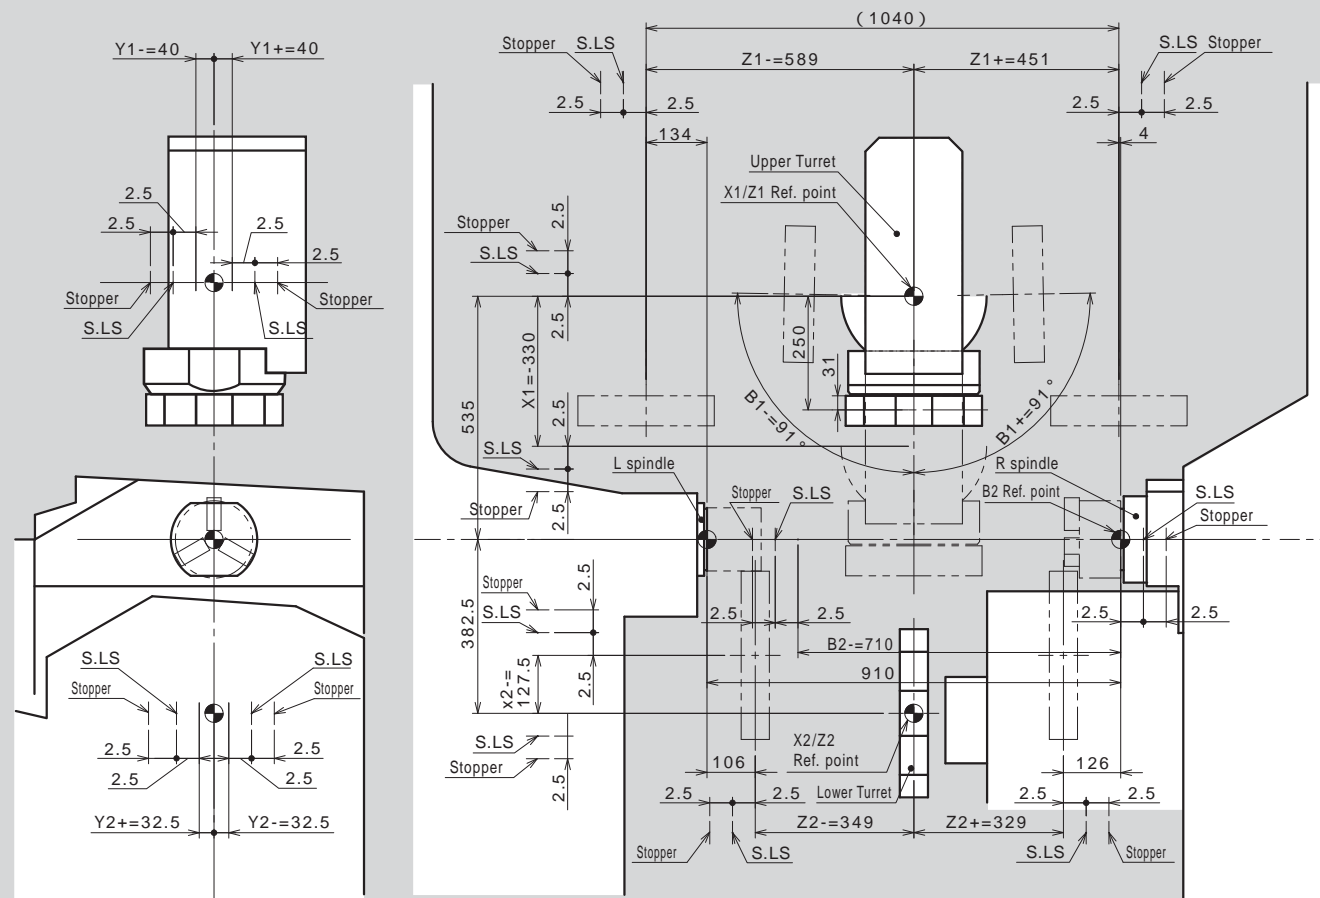

## Maximum Tool Diameter

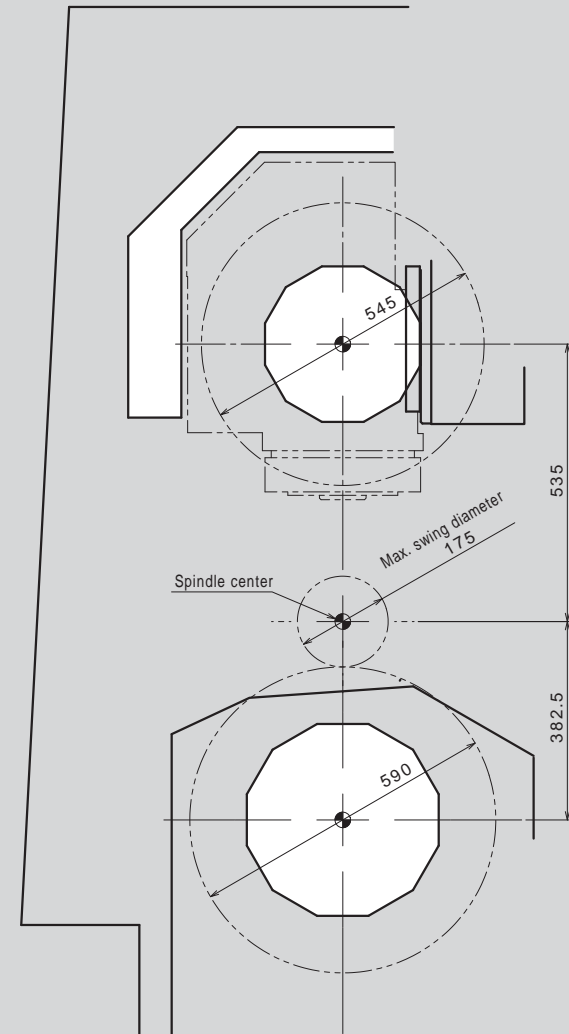

## Tool interference

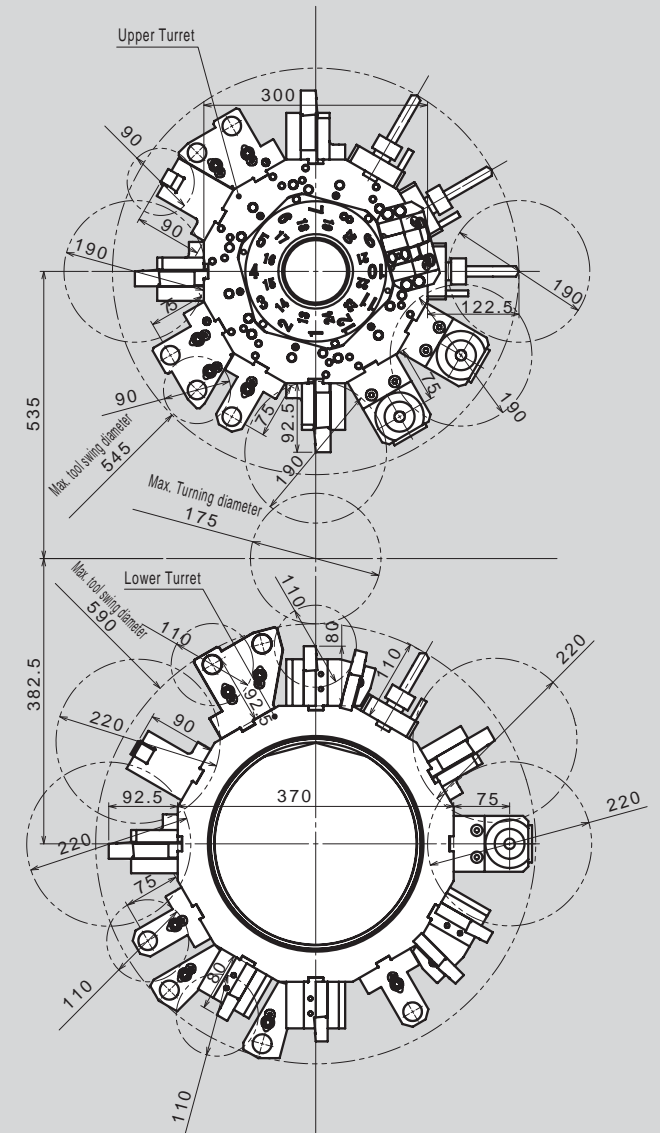

## Machine Dimensions

